



Fitting Glass Shades

- To fit the top and bottom glass shades, ensure that the knurled screws are loosened sufficiently to fit the glass into the slots.
- Slide the glass into position, ensuring that it is correctly located.
- Tighten the screws to finger tightness only to secure glass.
- Do not over tighten as this can crack the glass.

Fitting/replacing bulbs


- When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Remove the front bracket and large glass shade to gain access to the bulb. Pull bulb gently to remove from lampholder. To refit, locate in the lampholder and push home.
- Do not hold the glass when fitting or removing the bulb. Do not exceed the wattage stated for this fitting.

• CURVE22PLC:	26W G24d-3 2 PIN PLC
• CURVE33PLC:	
• CURVE15PLC:	18W G24d-2 2 PIN PLC
	

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.

Glass parts – Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Recycling advice

 Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Instruction leaflet

Curve PLC Wall

CURVE22PLC, CURVE30PLC, CURVE15PLC



saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This light fitting is Class 1 and must be connected to an Earth circuit

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Always use the correct type and wattage bulb. Exceeding the bulb wattage will damage the product.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully and responsibly.

This product is suitable for dimming when used in conjunction with a dimmable lamp. Please ensure verification of dimming abilities with the lamp manufacture prior to use.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Specification

Voltage:	240V 50Hz a.c.
Lamp:	CURVE22PLC: 1 x 26W G24d-3 PLC CURVE33PLC: 2 x 26W G24d-3 PLC CURVE15PLC: 1 x 18W G24d-2 PLC
IP rating:	20

Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged
- Cables in walls must be protected using suitable conduit or plastic trunking.
- The mains supply cable must have a minimum cross sectional area of 1.0mm²

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**

- Undo the screws holding the fixing bracket in place and set aside.
- Hold the bracket and lampholder assembly in place and mark the position of the holes. Ensure that the product is level.
- Ensure the wall is capable of holding the weight of the


product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.

- Fix into position. The product position can be finely adjusted by moving the product in the slots.

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole at the rear of the fixture. **Fit the supplied heatproof sleeving over**

the house wiring prior to connecting the wires to the terminal block. Connect to the terminal block inside the product in the following way:

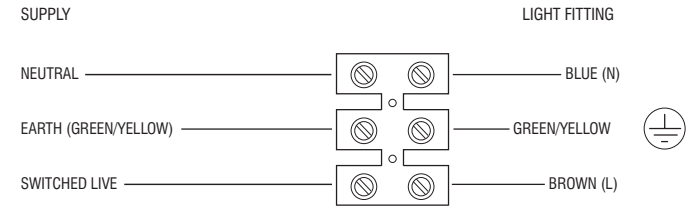

Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

Commissioning

- Fit the glass shades and bulb as per the instructions overleaf.
- Fit the front bracket over the allen bolts and secure using the supplied tool.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.