


GLAZED PORCELAIN

PIETRE VECCHIE™

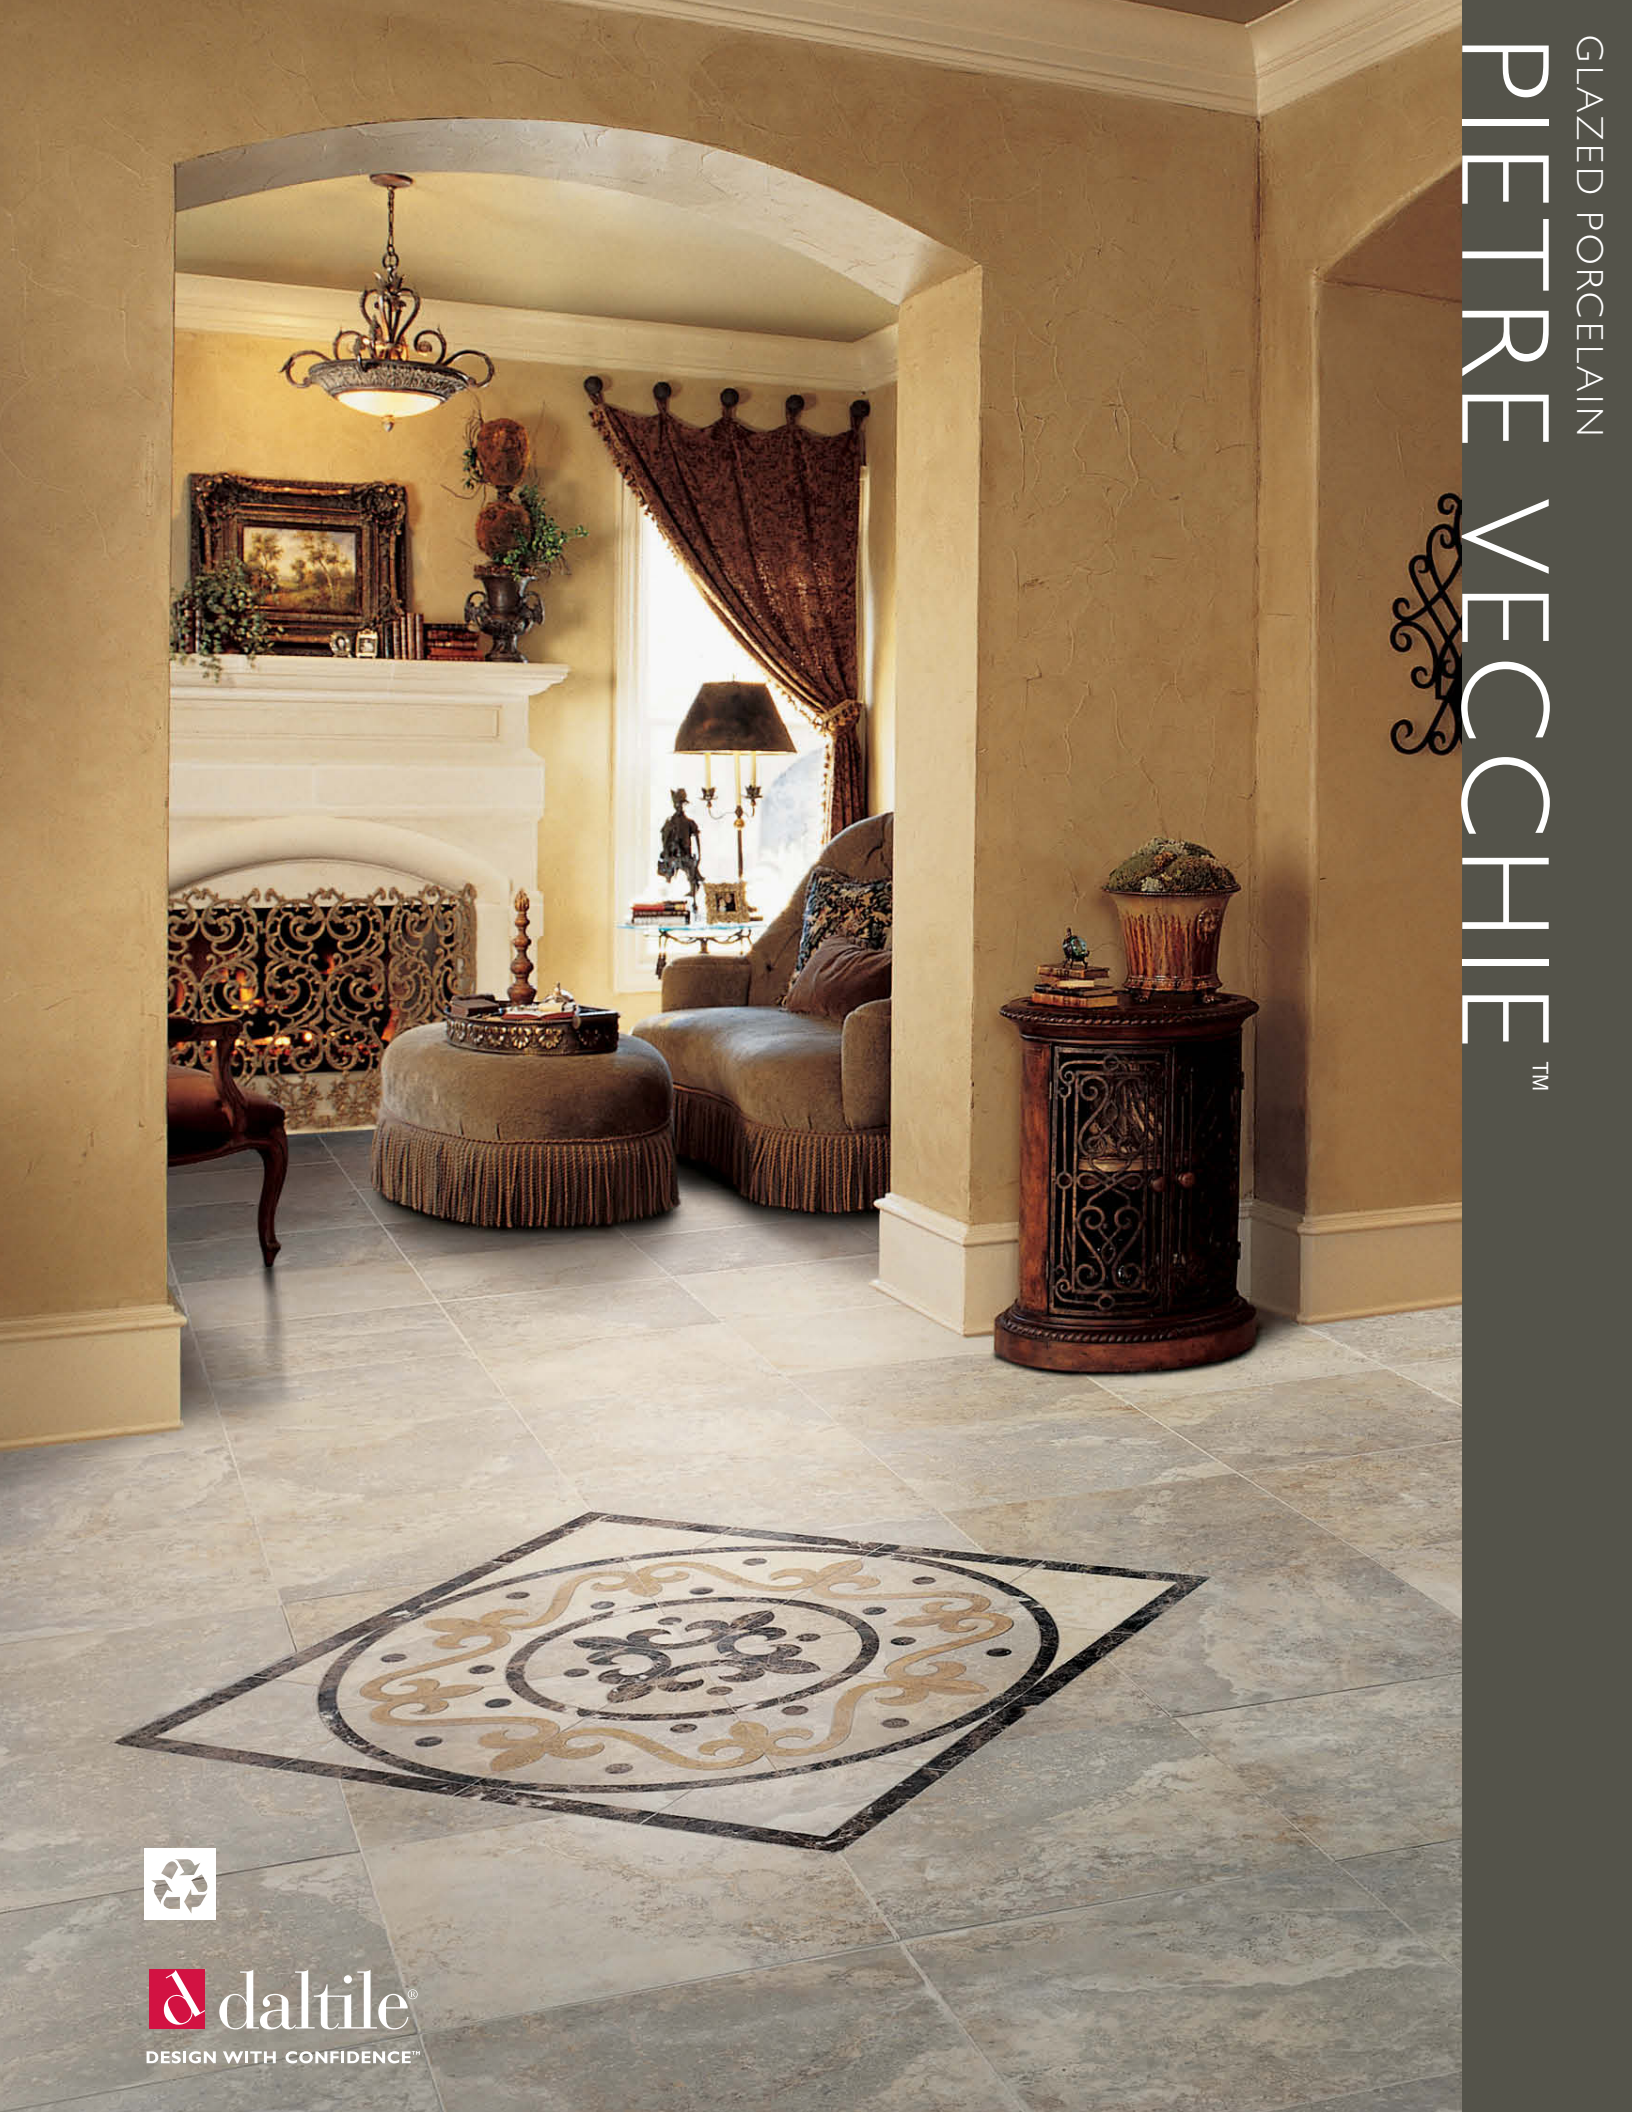

 **daltile**[®]
DESIGN WITH CONFIDENCE™

PIETRE VECCHIE™

GLAZED PORCELAIN



floor • wall • countertop

Pietre Vecchie was created to mimic the antique travertine stone found in Rome and quarried centuries ago from the shores of the Timor river. A stone recreation, this glazed porcelain has a richly layered veining and warm color palette that lends a natural elegance to all types of spaces. Pietre Vecchie has small tumbled mosaic pieces that can be used to create borders and accents - or backsplashes and shower floors. In addition, Pietre Vecchie also includes tiles with more generous dimensions that make it easy to appreciate the unique tone-on-tone movement found in each tile.

PIETRE VECCHIE™

GLAZED PORCELAIN

floor • wall • countertop

Field Tile



ANTIQUÉ IVORY PV01



CHAMPAGNE PV02




WARM WALNUT PV03



GOLDEN SIENNA PV04

Mosaics



ANTIQUÉ IVORY PV01
2 x 2 Mosaic



CHAMPAGNE PV02
2 x 2 Mosaic



WARM WALNUT PV03
2 x 2 Mosaic



GOLDEN SIENNA PV04
2 x 2 Mosaic

CREATIVE IDEAS

<i>Color</i>				
	ANTIQUE IVORY PV01	CHAMPAGNE PV02	WARM WALNUT PV03	GOLDEN SIENNA PV04
<i>Accent</i>				
	BAJA CREAM T720 4 x 12 Pebble Accent	EMPERADOR LIGHT CLASSIC/ CREMA MARFIL TS97 3 x 11 Accent	CHAMPAGNE GOLD M760 4 x 12 Pebble Accent	ANTALYA DARK/SIENNA GOLD/ MEDITERRANEAN IVORY TS67 4 x 12 Diamond Accent

Backsplash Design Idea



Backsplash features Golden Sienna 13 x 13 field tile with coordinating 2 x 2 mosaic.

Pattern Ideas



BRICK



GRID



BRICK PATTERN WITH MOSAIC



DIAMOND

PIETRE VECCHIE™

GLAZED PORCELAIN

SIZES

		SQ.FT. CARTON	PCS. PER CARTON
20 x 20 Field Tile	(19-1/2" x 19-1/2") (49.5 cm x 49.5 cm)	18.83	7
13 x 13 Field Tile	(12-7/8" x 12-7/8") (32.7 cm x 32.7 cm)	16.70	14
2 x 2 Tumbled Mosaic (Mesh-mounted)	(Sheet 12-7/8" x 12-7/8") (Sheet 32.7 cm x 32.7 cm)	14.33	12

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	ED

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed.

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	LIGHT RESIDENTIAL	COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed. Use of a latex modified thin-set is recommended for installation.

NOTES

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.

Use of a latex modified thin-set is recommended for installation.

Special consideration needs to be given when installing tiles 20" and larger. Please refer to www.daltile.com/LargeTiles for more information.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information on Test Results and Classifications, visit us at www.daltile.com/TestResults

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
 Bullnose	S-43E9	3 x 13	30

SHADE VARIATION



INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8"	3/16"

DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < .42

2 ≥ .42

STATIC C.O.F. (WET) : 3

1 < .50

2 .50 - .59

3 ≥ .60

TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.5
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	Wet: ≥ 0.42
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.66
Abrasion Resistance	C1027	4

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a product's suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.

PIETRE VECCHIE™

GLAZED PORCELAIN



floor • wall • countertop



daltile
greenworks™
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.



PRE CONSUMER
RECYCLED MATERIALS

CERTIFIED
PORCELAIN™
TILE
0.5% or less water absorption



7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about Daltile products and services, visit our website at daltile.com

©2012 Dal-Tile Corporation (10/12) SSDTPIETRAV