

8123HRA


6" IC Airtight Remodel Housing



Royal Pacific Ltd.

4931 Paseo Del Norte NE
Albuquerque, NM 87113
Ph: 1-800-937-6925
Fax: 1-888-207-9509

FLUORESCENT HOUSING

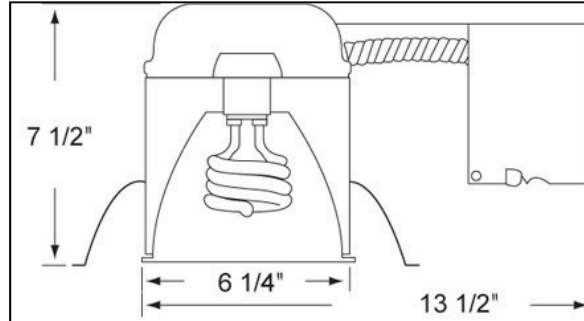

GENERAL DESCRIPTION

Designed for use where housing will be in direct contact with insulation.

MAIN FEATURES

Standards Conformance

- IC Rated for direct contact with Non-Cellulose type insulation.
- Thermally protected against improper lamping.
- Meets Washington State energy code for restricted airflow requirements.

Listing

- ETL & c-ETL listed for damp location and feed through wiring.

Voltage

- Line voltage.

Lamps

- Compact Fluorescent (included).
- 8123HRA-E1237 - 13W GU24 - 2700K
- 8123HRA-E1341 - 13W GU24 - 4100K
- 8123HRA-E1827 - 18W GU24 - 2700K
- 8123HRA-E1841 - 18W GU24 - 4100K
- 8123HRA-E2327 - 23W GU24 - 2700K
- 8123HRA-E2341 - 23W GU24 - 4100K

Junction Box

- Listed for through-branch circuit wiring (4 in-4 out) and seven 1/2" knockouts and four non-metallic cable knockouts with strain clamps.
- 3-port quick connectors pre-installed in J-box.

Bar Hangers

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span.
- Bar hangers can be turned 90° on the plaster frame.
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers.

Fit

- Adjusts to accommodate up to 1" ceiling thickness.
- 7 1/2" height allows use in 2" x 8" joist construction.

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks