

# Fusion Jack 4" Round Flush Canopy

CK0011-FJ-

1.6



Fusion Jack™


## GENERAL PRODUCT INFORMATION:

This product is suitable for indoor dry locations only.




Minimum volume of the electrical box must be 6 cubic inches (98 cubic centimeters).


Model numbers ending in “-LED” or “-LED277” can be dimmed with a low-voltage electronic dimmer, have a rated maximum output of 60 watts, and are compatible with LED elements. All other model numbers can be dimmed with a standard incandescent dimmer, have a rated maximum output of 75 watts, and are not compatible with LED elements.

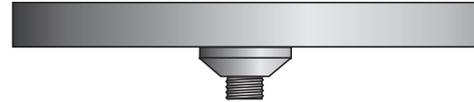


## Install the 4" Round Flush Canopy

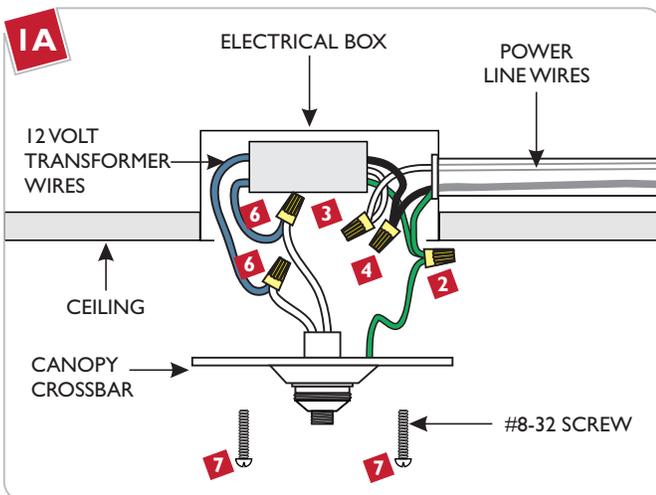

- 1 Turn the power to the electrical box off.
- 2 In accordance with local electrical codes, ground the canopy braided copper wire and the green transformer wire (if attached).
- 3 Connect the white transformer wire to the neutral power line wire with a wire nut.
- 4 Connect the black transformer wire to the hot power line wire with a wire nut.
- 5 Place the transformer and all the wires inside the electrical box. Use the adhesive pad to secure the transformer in the electrical box.
- 6 Connect the canopy wires to the red transformer wires with wire nuts.
- 7 Mount the canopy crossbar to the electrical box with the two long #8-32 screws.

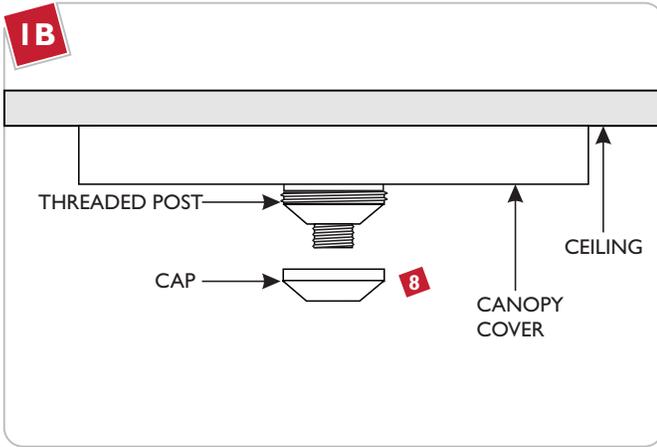

- 8** Place the canopy cover over the crossbar and screw the cap onto the threaded crossbar post.

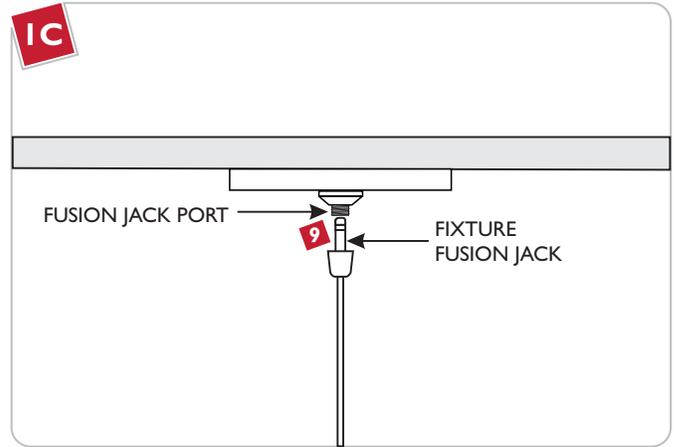

- 9** Screw the fixture Fusion Jack into the Fusion Jack port.
- 10** Turn the power on.

**SAVE THESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077

800.323.3226 - 847.626.6300

[www.lblighting.com](http://www.lblighting.com)

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company