

8178H-Exxx

8" HID Housing



Royal Pacific Ltd.


4931 Paseo Del Norte NE
Albuquerque, NM 87113
Ph: 1-800-937-6925
Fax: 1-888-207-9509

HID HOUSING



GENERAL DESCRIPTION

HID-Metal Halide Downlight.

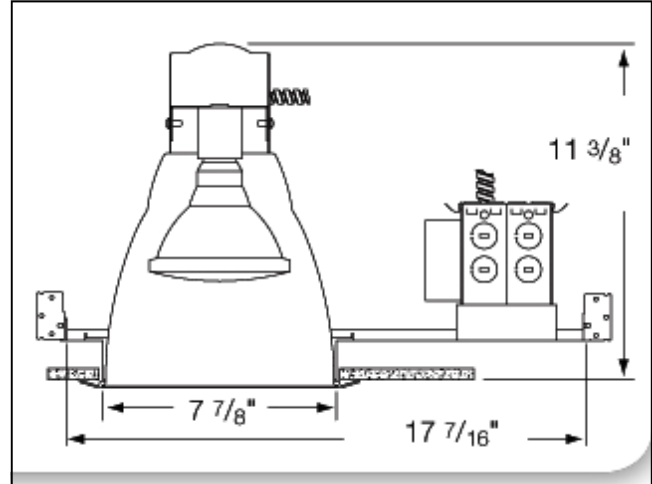

MAIN FEATURES

Standards Conformance

- Non-IC Rated.

Listing

- UL & cUL listed for damp location and feed through wiring.

Voltage

- 120V or 277V

Lamps

- 70W PAR38 / ED17
- 100W PAR38 / ED17
- 150W PAR38 / ED17

Ballast

- Electronic

Junction Box

- Eight 1/2" knockouts, two concentric 1/2" or 3/4" knockouts and eight non-metallic cable knockouts with strain clamps.

Bar Hangers

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span.
- Bar hangers can be turned 90° on the plaster frame.
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers.

Socket

- Adjustable socket for proper positioning of different lamp types.

Fit

- Adjusts to accommodate up to 1 1/2" ceiling thickness.

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks