

# 8191HA-Exx-ES / 8191HA-Exx-EM-ES / 8191HA-Dxx-ES


## 4" IC Airtight Compact Fluorescent Housing



**Royal Pacific Ltd.**

4931 Paseo Del Norte NE  
Albuquerque, NM 87113  
Ph: 1-800-937-6925  
Fax: 1-888-207-9509

### DOUBLE WALL COMPACT FLUORESCENT HOUSING

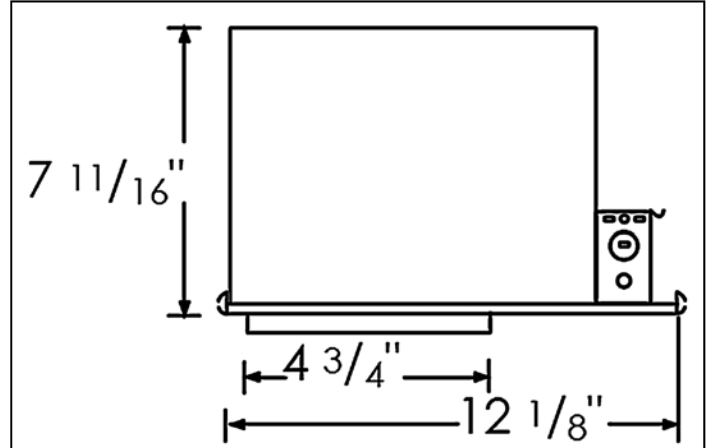

#### GENERAL DESCRIPTION

Compact fluorescent housing with emergency backup and dimmable options.

#### MAIN FEATURES

##### Standards Conformance

- IC Rated for direct contact with Non-Cellulose insulation.
- Thermally protected against improper lamping.
- Meets Washington State energy code for restricted airflow requirements.

##### Listing

- UL & cUL listed for damp location and feed through wiring.
- Energy Star listed.

##### Voltage

- 120 / 277V

##### Lamps

- 1 x 13W
- 1 x 18W
- 1 x 26W

##### Junction Box

- Listed for through-branch circuit wiring (4 in-4 out) and five 1/2" knockouts and four non-metallic cable knockouts with strain clamps.

##### Bar Hangers

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span.
- Bar hangers can be turned 90° on the plaster frame.
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers.

##### Socket

- G24 / GX24

##### Fit

- Adjusts to accommodate up to 1" ceiling thickness.
- 7 11/16" height allows use in 2" x 8" joist construction.

##### Alternate Configurations

- 8191HA-Exx-EM-ES includes a pre-installed emergency backup unit which provides 90 minutes of illumination when normal power source fails.
- 8191HA-Dxx-ES includes dimmable ballast.

##### Special Features

- Double wall construction.

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks