

8196HA-Exx-ES / 8196HA-Exx-EM-ES / 8196HA-Dxx


6" IC Airtight Compact Fluorescent Housing



Royal Pacific Ltd.

4931 Paseo Del Norte NE
Albuquerque, NM 87113
Ph: 1-800-937-6925
Fax: 1-888-207-9509

COMPACT FLUORESCENT HOUSING

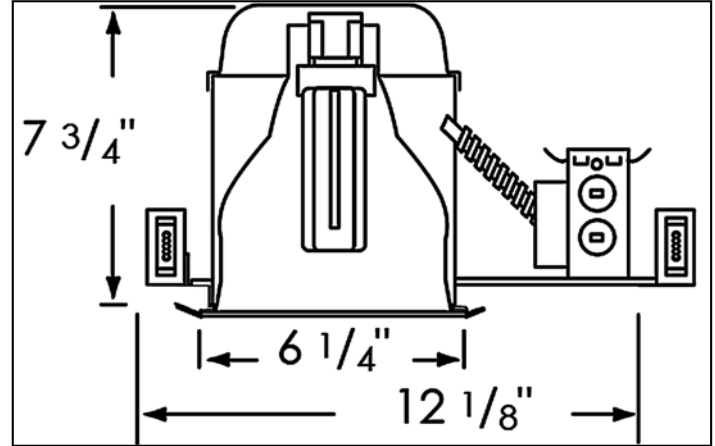

GENERAL DESCRIPTION

Compact fluorescent housing with emergency backup and dimmable option.

MAIN FEATURES

Standards Conformance

- IC Rated for direct contact with Non-Cellulose type insulation.
- Thermally protected against improper lamping.
- Meets Washington State energy code for restricted airflow requirements.

Listing

- UL & cUL listed for damp location and feed through wiring.
- Energy Star Listed.

Voltage

- Line Voltage

Lamps (not included)

- 1 x 13W
- 1 x 18W
- 1 x 26W

Ballast

- Electronic
- High Power Factor (HPF)
- For 4-pin lamp.

Junction Box

- Listed for through-branch circuit wiring (4 in-4 out) and five 1/2" knockouts and four non-metallic cable knockouts with strain clamps.

Bar Hangers

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span.
- Bar hangers can be turned 90° on the plaster frame.
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers.

Socket

- G24 / GX24.

Fit

- Adjusts to accommodate up to 1" ceiling thickness.
- 7 3/4" height allows use in 2" x 8" joist construction.

Alternate Configurations

- 8196HA-Exx-EM-ES includes a pre-installed emergency backup unit which provides 90 minutes of illumination when normal power source fails.
- 8196HA-Dxx includes a dimmable ballast.

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks