

Commissioning

- Refit the LED module unit by clipping it into place. Ensure the suspension clips are fastened to the LED module unit to ensure it does not fall away from the body when suspended.
- Refit the diffuser ensuring all of the clips are securely fastened.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fitting/replacing bulbs

- The LEDs in this fitting are non-replaceable.
- If any damage occurs this fitting should be discarded.

Care and cleaning

We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

Live Voltages may be present in this unit even when turned off or when completely disconnected. For your safety, always switch off the supply before cleaning.

Instruction leaflet

IP65 LED Anti Corrosive Batten

60830, 60831, 60832, 60833, 60834, 60835



saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is rated at IP65.

This light fitting contains non-replaceable parts and cannot be serviced.

If damage occurs the part should be discarded.

This product is not dimmable.

Specification

Voltage:	240V 50Hz a.c.	
Lamp:	60830	: 19W LED module
	60831	: 27W LED module
	60832	: 30W LED module
	60833	: 37W LED module
	60834	: 46W LED module
	60835	: 55W LED module
IP rating:	65	

Layout

- This product can be installed on the ceiling or wall.
- Ensure the ceiling or wall is capable of holding the weight of the product

Installation

Existing fittings must be completely removed before installation of a new product. **Before removing the existing fitting, carefully note the position of each set of wires.**


- Remove diffuser by unfastening securing clips.
- Remove the LED module unit by squeezing together the 2 sets of tabs.
- Hold the product in place and mark the position of the fixing holes. This may require the help of an assistant. If wall mounting, ensure that the product is level.
- Ensure the ceiling or wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should

be used for brick, cavity walls or plasterboard.

- Feed the supply cable through the end grommet and fix the light fitting into position. Alternatively, the grommet can be removed and the supplied cable gland fitted.
- Connect the supply cable to the quick fit terminal block on the LED module unit as below.

Wiring

Having correctly identified the wiring from your existing light fitting, connect to the connection block inside the product in the following way:

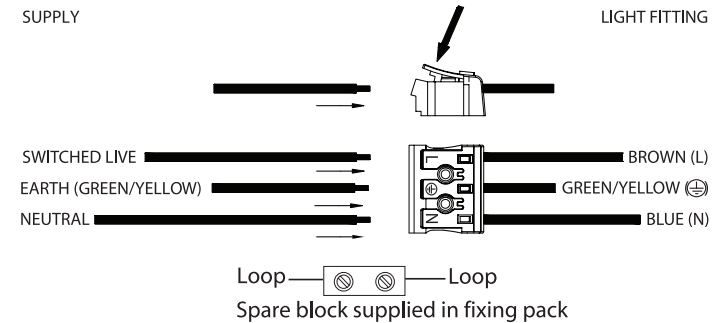

Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.