


## Wiring

Having correctly identified the wiring from your existing light fitting, fit the cable into the cable clamp and through

the black rubber grommet. Connect to the connection block inside the product in the following way:

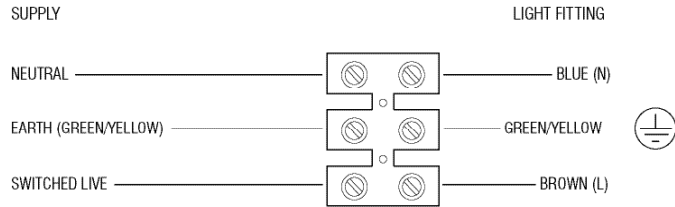

## Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.
- The cable clamp is secured over the cable.

## Commissioning

- Attach the mirror to the wall by locating over the screw heads. Ensure the screw heads are fully engaged into the hanging slots.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.
- Activate your new LED mirror by swiping your hand in front of the sensor.

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- Mirror – Use a damp cloth or a propriety glass cleaner. Do not use abrasive materials as these will damage the finish.


## Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

## Safety information

**Live Voltages may be present in this unit even when turned of or when completely disconnected.** For your safety, always switch off the supply before changing lightbulbs, or cleaning.




The mirror must be replaced immediately should it become cracked or damaged. This fitting must not be used without the mirror in place.

## Instruction leaflet

# Merle Mirror

60898

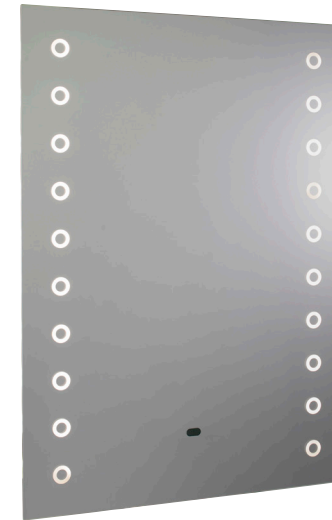

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

### This is a Class 1 product and must be earthed

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

This product is not suitable for dimming.

This product is rated at IP44.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Specification

Voltage: 240V 50Hz a.c.  
Lamp: 10W LED (SMD 2835) - 23lm per LED (144 in total)  
IP rating: 44

## Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Cables in walls must be protected using suitable conduit or plastic trunking.
- The mains supply cable must have a minimum cross sectional area of 1.0mm<sup>2</sup>.
- This product has special protection against the ingress of moisture and is IP44 rated.
- This product is fitted with a no touch infra-red switch, helping to keep the mirror clear of fingerprints. To operate, simply wave your hand in front of the sensor.

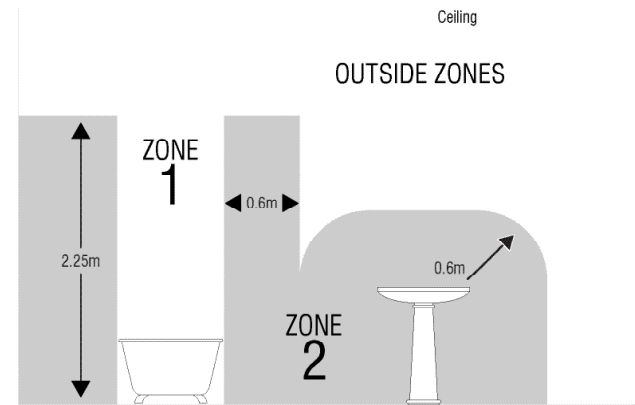

This product is suitable for use in Zone 2 and outside Zones of a bathroom. See diagram. If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used, in accordance with IEE regulations.

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- The installation of this product will be easier with the help of an assistant.

- Using the hole spacing dimensions detailed below, mark and drill the fixing holes. Take care to avoid damaging any concealed wiring or pipes. Fit the wall plugs and supplied screws. Ensure the screw heads protrude from the wall around 3mm as shown in Fig A. Ensure the screw holes are accurately located in the wall, as the mirror will hang from the screws.
- Wire as detailed overleaf.

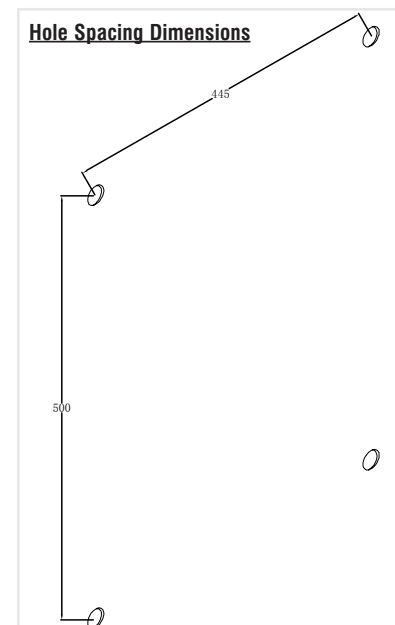


Fig. A

