# Finch Float and Flush Square or Round Ceiling (LED)

700FMFIN -LED

1.1



### **GENERAL PRODUCT INFORMATION:**




This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for damp locations.

This product can be dimmed using a low-voltage electronic dimmer.

This instruction shows a typical installation.

## **Install the Fixture**

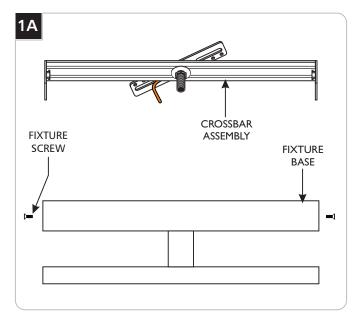


1 Separate the crossbar assembly from the fixture base by unscrewing and removing the two fixture screws.



#### **CAUTION - RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

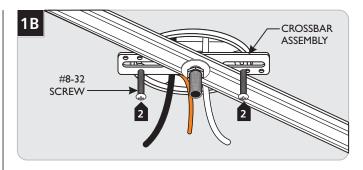


**Note:** If necessary, loosen the nut on the crossbar to adjust it to the desired position.

2 Mount the crossbar assembly to the electrical box with the two provided #8-32 screws.

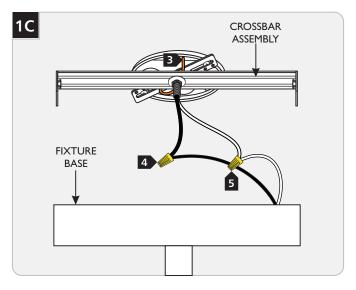

- Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the black driver wire to the hot power line wire with a wire nut.
- 5 Connect the white driver wire to the neutral power line wire with a wire nut.

**Note:** Square versions only have drivers with 0-10V dimming capability. Connect the purple and gray wire if applicable.

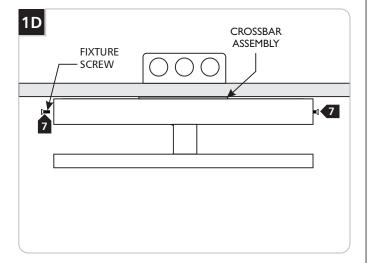

- 6 Place all wires and wire nut connections inside the fixture base.
- Align the fixture base holes with the crossbar assembly holes. Secure the fixture in place by tightening the two fixture screws.

## **SAVE THESE INSTRUCTIONS!**

# TECH LIGHTING°

7400 Linder Ave, Skokie, IL 60077 847.410.4400

#### www.techlighting.com

© 2014 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company