

**Power Jack Sportster With Ceramic Metal Halide PAR**

**700PJSSC\_ 2.0**

**T~TRAK**

**HEADS-LINE VOLTAGE**

**GENERAL PRODUCT INFORMATION:**





This product is suitable for indoor dry locations only.


This product is intended for use only with Tech Lighting Power Jack & T~trak™ systems.


This product is patented (U.S. PAT. 7,172,332).


**Install the CMH PAR20 or PAR30 Lamp**


**NOTE:** Turn off power to the system before installing, removing, or relamping the fixture.

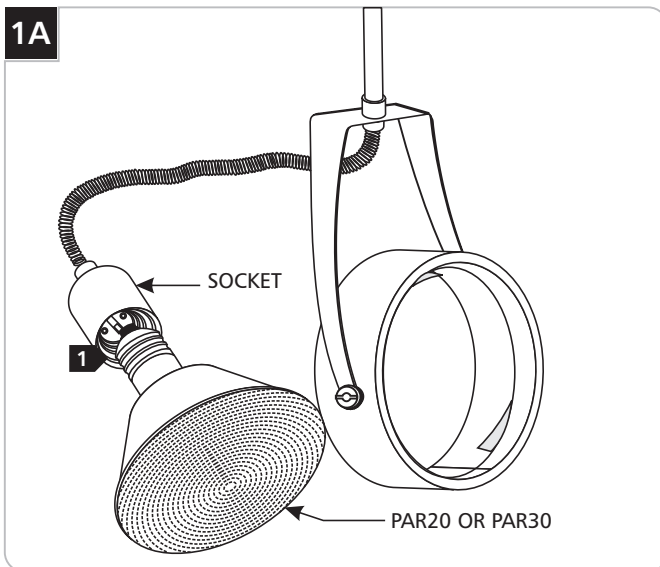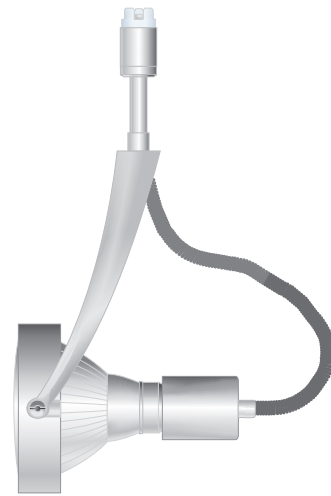


Use 120 Volt, 20 Watt Ceramic Metal Halide PAR20 Lamp with 700PJSSC202\_ Models. 


Use 120 Volt, 39 Watt Ceramic Metal Halide PAR20 Lamp with 700PJSSC203\_ Models. 

Use 120 Volt, 20 Watt Ceramic Metal Halide PAR30 Long Lamp with 700PJSSC30L2\_ Models. 

Use 120 Volt, 39 Watt Ceramic Metal Halide PAR30 Long Lamp with 700PJSSC30L3\_ Models. 


Use 120 Volt, 70 Watt Ceramic Metal Halide PAR30 Long Lamp with 700PJSSC30L7\_ Models. 

**1** Screw the lamp into the socket.

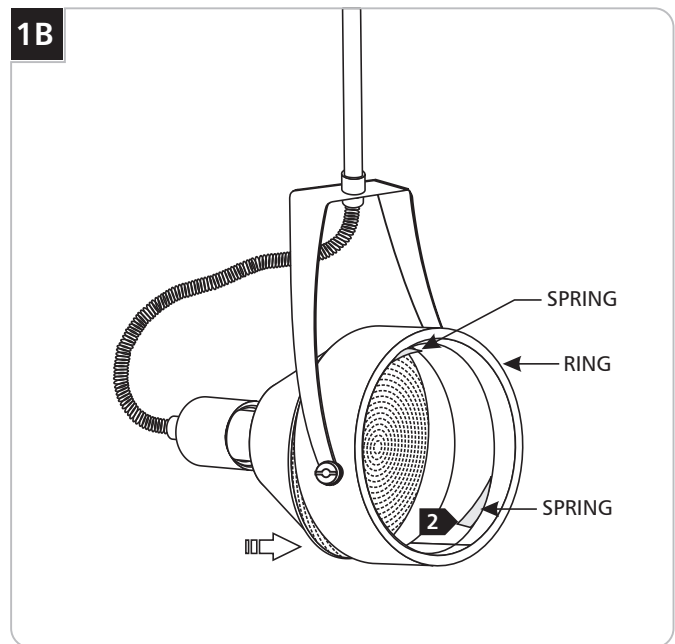

**2** Push the lamp edge against the springs inside the ring until the edge of the lamp locks behind the springs.

## SPECIAL INSTALLATION: Locking the Fixture in Permanent Position (Optional)

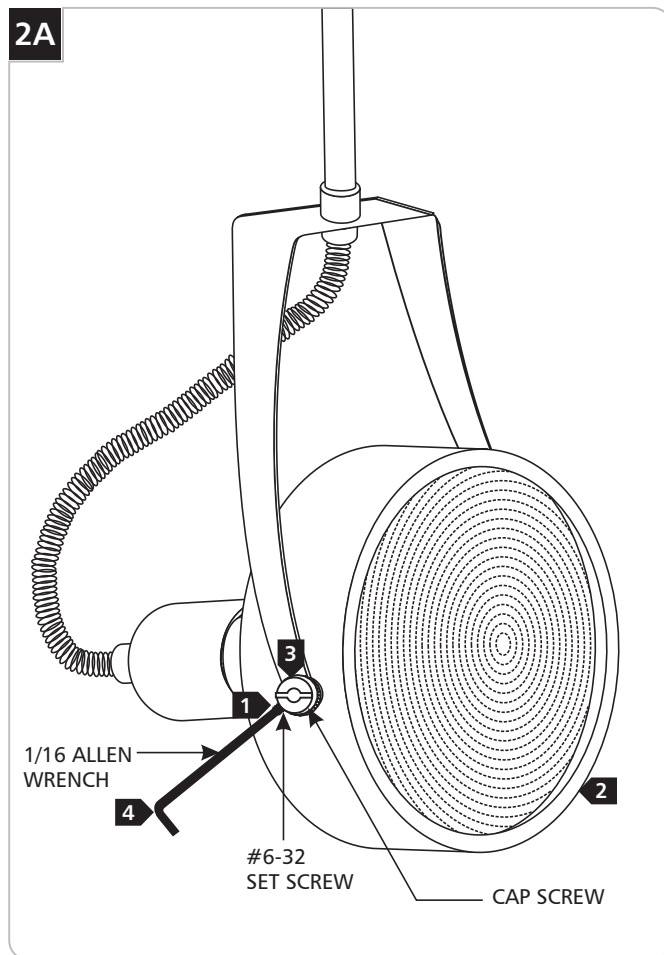

- 1 To lock the fixture head in a permanent vertical position, loosen (DO NOT REMOVE) the #6-32 set screw on the edge of the cap screw with the provided 1/16 Allen wrench.
- 2 Rotate the fixture head to the desired position.
- 3 Tighten the cap screw with a flat head screwdriver.
- 4 Tighten the #6-32 set screw with the 1/16 Allen wrench.

**SAVE THESE INSTRUCTIONS!**

## IMPORTANT SAFETY INSTRUCTIONS

*To reduce the risk of fire, electrical shock, exposure to excessive UV radiation, or injury to person:*

- Use this fixture indoors only.
- Do not look directly at the lighted lamp.
- Do not remain in light if skin feels warm.
- Risk of fire: Use only the type of lamp and maximum wattage indicated in this instruction manual.
- Never cover the Ceramic Metal Halide lamp with anything other than a Tech Lighting lens and never place flammable material close to your fixture.
- Never turn the fixture on and off by connecting and disconnecting the CMH lamp.
- Do not touch the fixture shades or lamp shield while the fixture is on. These surfaces may be HOT.
- Relamp fixtures at or before the end of rated life. Beyond rated life, light output diminishes while energy consumption and risk of rupture increases.

## CMH Lamp General Information

- A new CMH lamp is a discharge lamp and requires some time to start and come to full brightness after a power interruption.

## A Tip For Prolonging CMH Lamp Life

- Do not operate the lamps continuously for extended periods, turn the lamp off once per week for at least 15 minutes. This will reduce the risk of rupture.

**T~TRAK**  
a brand of **TECH LIGHTING**

7400 Linder Ave, Skokie, IL 60077  
847.410.4400

[www.ttraklighting.com](http://www.ttraklighting.com)

© 2010 Tech Lighting, L.L.C. All rights reserved. The "T~trak" graphic is a registered trademark of T~trak™. T~trak™ reserves the right to change specifications for product improvements without notification.  
A Generation Brands Company