



Catalog Number	
Notes	Type

Indoor Decorative

Low Profile Square Flush Mount

ESSENTIAL SERIES

Circline T9 or Compact DTT Fluorescent



FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in foyers, hallways, bedrooms, offices, utility work areas, stairways, and many other rooms in the house.

ATTRIBUTES

The beauty of simplicity in a low profile styled square, stay-white, acrylic diffuser, available in three sizes: 12", 15", or 20". These fixtures provide an attractive low-cost lighting solution for every room in the home. Hidden cam-latches provide for easy diffuser removal for installation and maintenance.

Fixtures available with lamps and without lamps. Fixtures without lamps are available in either compact double twin tube (DTT) or circline T9 fluorescent lamp configurations. Fixtures with lamps include circline T9 4100K fluorescent lamp(s) for energy efficiency, superior color rendering and long life.

Standard with electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics. For use with non-dimmable switches only.

All mounting hardware included.


Fixtures with lamps included, available in resale packs of four only.

LISTING

CUL listed to US and Canadian safety standards and suitable for damp locations. Fixtures with lamps are ENERGY STAR[®] qualified.


WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

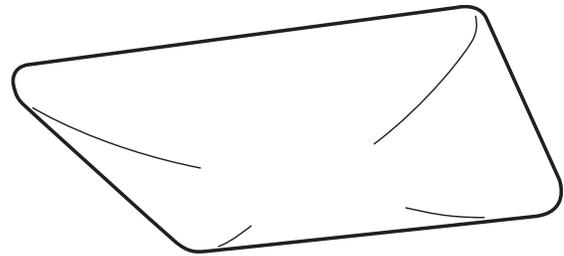

DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
12 sq."		FM22 ACLS LP R4	(1) 22W circline T9	12" (30.5)	12" (30.5)	3-1/4" (8.3)
		FMLS 22	(1) 22W circline T9	12" (30.5)	12" (30.5)	3-1/4" (8.3)
		FMLS12 2 13DTT	(1) 13W compact (DTT)	12" (30.5)	12" (30.5)	3-1/4" (8.3)
15 sq."		FM54 ACLS LP R4	(1) 22W & (1) 32W circline T9	14-3/4" (37.5)	14-3/4" (37.5)	3-3/8" (8.6)
		FMLRS 54	(1) 22W & (1) 32W circline T9	14-3/4" (37.5)	14-3/4" (37.5)	3-3/8" (8.6)
		FMLS15 2 18DTT	(2) 18W compact (DTT)	14-3/4" (37.5)	14-3/4" (37.5)	3-3/8" (8.6)
20 sq."		FM72 ACLS LP R4	(1) 32W & (1) 40W circline T9	19-3/4" (50.0)	19-3/4" (50.0)	3-5/8" (9.2)
		FMLS 72	(1) 32W & (1) 40W circline T9	19-3/4" (50.0)	19-3/4" (50.0)	3-5/8" (9.2)
		FMLS20 3 26DTT	(3) 26W compact (DTT)	19-3/4" (50.0)	19-3/4" (50.0)	3-5/8" (9.2)

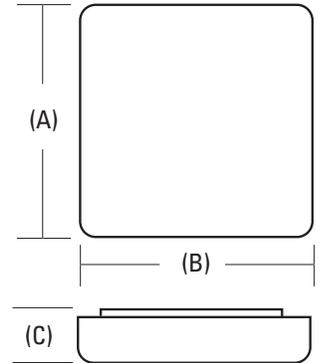

* Extension from ceiling

All dimensions are in inches (centimeters)

ORDERING INFORMATION

Example: **FM22 ACLR LP R4**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Model Number¹

Options

(Consult factory)

- 12" square**
FM22 ACLS LP R4² (1) 22W circline T9 lamp **Included^{2,4}**
FMLS 22 (1) 22W circline T9 lamp required **Required³**
FMLS 12 2 13 DTT (2) 13W (DTT) lamp(s) **Required³**
- 15" square**
FM54 ACLS LP R4² (1) 22W & (1) 32W circline T9 lamps **Included^{2,4}**
FMLRS 54 (1) 22W & (1) 32W circline T9 lamp **Required³**
FMLS 15 2 18 DTT (2) 18W compact (DTT) lamp(s) required **Required³**
- 20" square**
FM72 ACLS LP R4² (1) 32W & (1) 40W circline T9 lamps **Included^{2,4}**
FMLS 72 (1) 32W & (1) 40W circline T9 lamp required **Required³**
FMLS 20 3 18 DTT (3) 26W compact (DTT) lamp(s) required **Required³**

- Notes:
 1. Use with non-dimmable switches only.
 2. **INCLUDES** - (1) 55W 2C circline T9 3500K fluorescent lamp.
 3. **Lamp(s) not included.**
 4. Resale packs must be ordered in increments of 4.

Low Profile Square Flush Mount

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.