


MARAZZI USA

the fine art of porcelain stoneware

(vesale stone)

glazed porcelain stoneware

Made In The USA

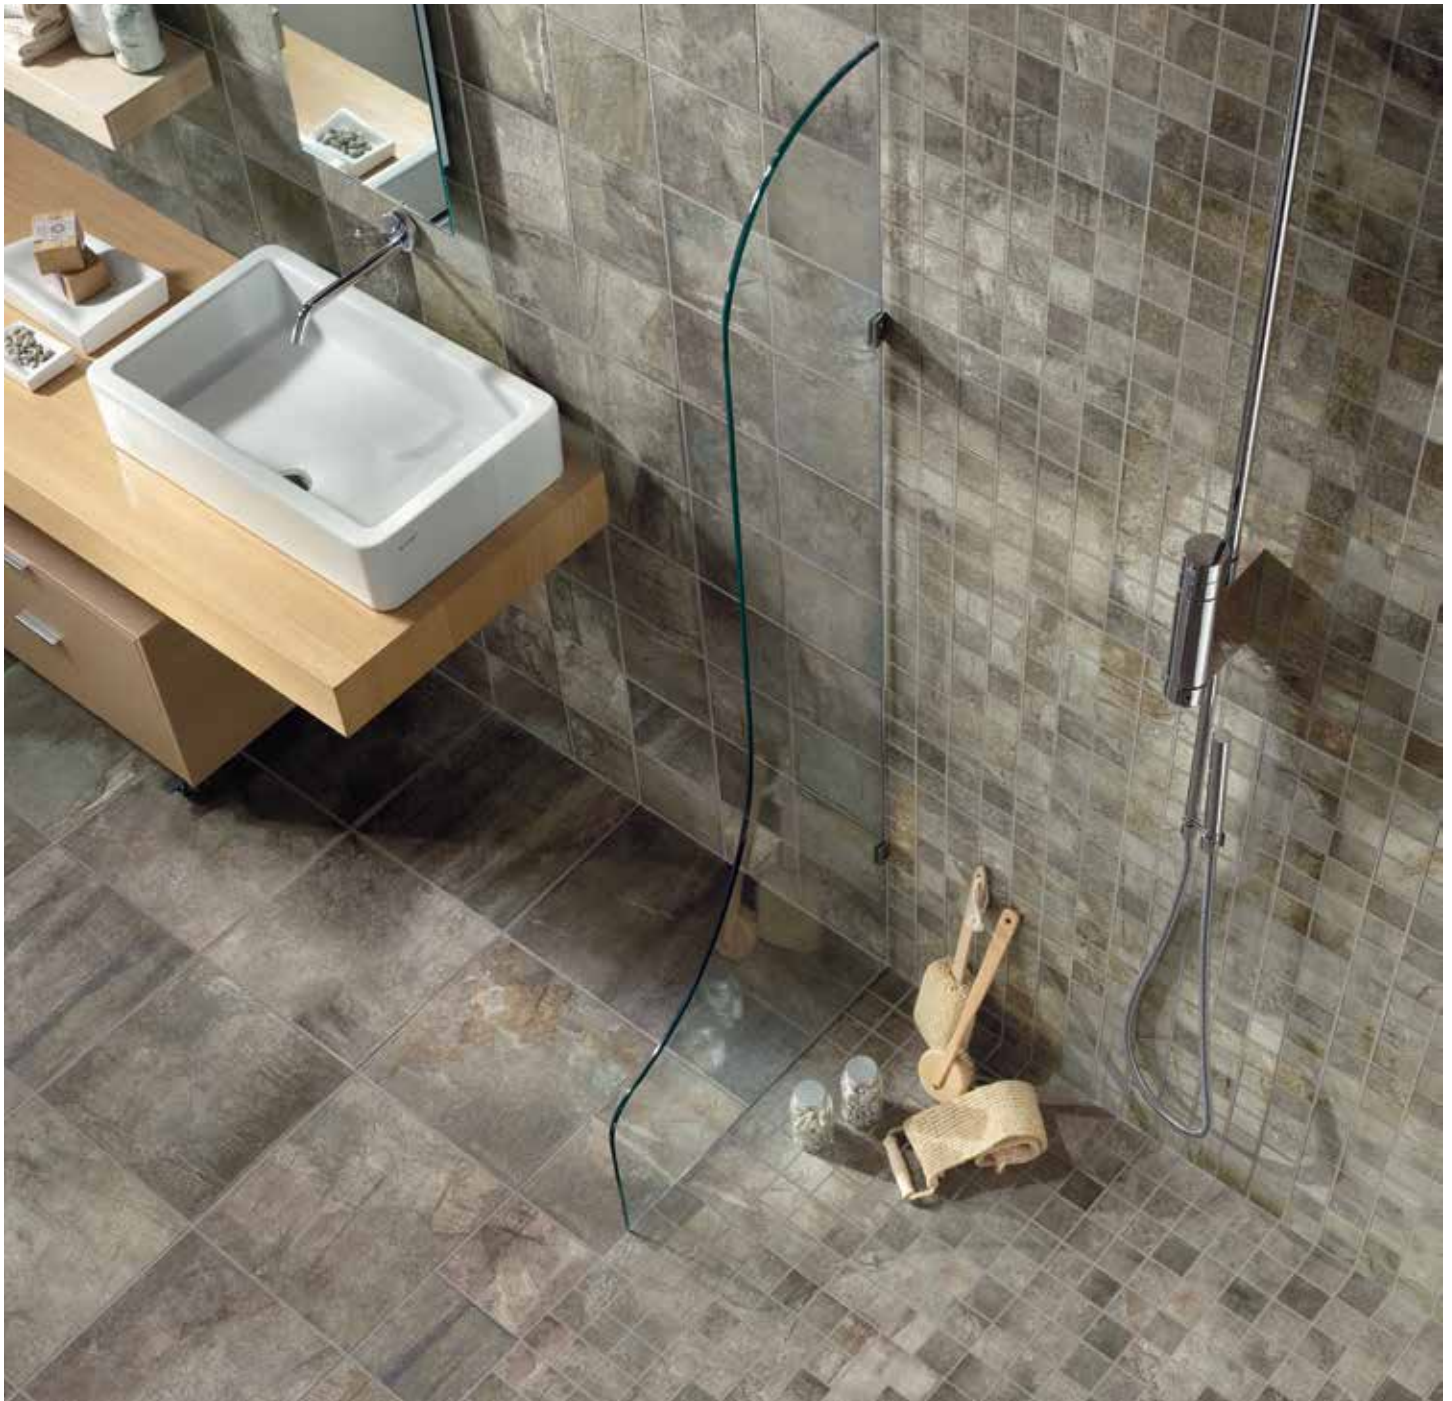



Contributes to LEED Credits **made in the USA**

	MODULAR TILE		FLOOR TILE		DECOS			TRIMS*
Thickness	6 1/2" x 6 1/2" (16.5 x 16.5 cm)	13" x 13" (33.3 x 33.3 cm)	10" x 20" R (25 x 50 cm)	20" x 20" (50 x 50 cm)	13" x 13" Mosaic - Square 1" x 1" (33.3 x 33.3 cm)	13" x 13" Mosaic - Square 2" x 2" (33.3 x 33.3 cm)	13" x 13" Mosaic - Diamond 2" x 3 1/2" (33.3 x 33.3 cm)	3" x 13" Bullnose (8 x 33.3 cm)
Names (colors)	UF2A	UF2L	UF2G	UF2Q	UF2Y	UF24	UF28	UF2U
Moss (green)	UF2B	UF2M	UF2H	UF2R	UF2Z	UF25	UF29	UF2V
Rust (brown)	UF2C	UF2N	UF2J	UF2S	UF22	UF26	UF3A	UF2W
Sand (beige)	UF2D	UF2P	UF2K	UF2T	UF23	UF27	UF3B	UF2X
Smoke (gray)								

Notes: * Trim is available in all colors and made to complement Modular and Floor Tile.

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	7	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 500 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 3.0%	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only)	As Reported	Minimum 0.42	DCOF AcuTest™**
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.80 ≤ C.O.F. < 0.90	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

*Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.

**DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

**Whichever is less