

INSTALLATION AND WIRING DIAGRAM


USA

LEDRA SERIES LEDS

LEDRA™ TRIO

ART. NO. 135 251mc
 135 251mc-1

matte chrome, white, 5000k
 matte chrome, white, 3000k



IMPORTANT SAFETY INSTRUCTIONS



1. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH LOCAL AND NATIONAL CODE.
2. This product must be wired in series to a Class 2 LED driver only with 700mA output.
3. DRY LOCATIONS ONLY.
4. SUITABLE FOR SUSPENDED CEILING.
5. Turn off power prior to any work on the systems.
6. Warranty is void in case of unauthorized modifications and/ or improper use.


READ ALL OF THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE FIXTURE

Contents of Delivery:


LEDRA TRIO - qty. (1)

WARNING - Wiring multiple fixtures together must be done in series; DO NOT wire the fixtures in parallel.

Step 1
 - Drill a 2 3/4" hole into the mounting surface.

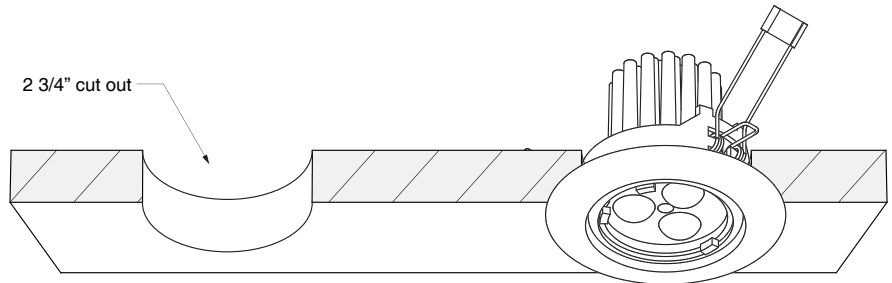

Step 2
 - Squeeze spring anchors (A) and fit Trio into the cutout. The anchor should fit tightly in the hole and be flush with the mounting surface.

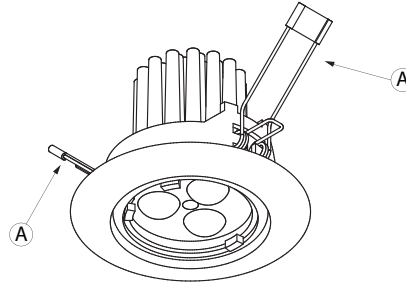

Step 3 (wiring one or more fixtures)
 - Wire the line voltage wires to the line input and neutral connections on the driver (C).

- The (+) brown wire of the fixture must connect with the (+) output on the driver. The (-) blue wire must connect with the (-) output on the driver.

- 1 fixtures can be wired when used with D-17W driver or 2 to 3 fixtures can be wired using the D-40W driver. The (-) blue wire of one fixture should connect with the (+) brown wire of the next fixture.

