

# PARTS & ASSEMBLY SHEET






















Fixture Name: **Empyreal 1220-SF RT**

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_ Co. Account #: \_\_\_\_\_  
to be filled out by retailer

Canopy  1ea @5"Dia x 1"E	Wire connectors  3ea P3 Orange	Top loop  1ea 3/8"IP*H80mm
Chain  1ea 6ft x 5.0mm	Junction Box Screw  2ea #8-32N*H25mm	Spring Washer  1ea Φ15*H3mm
Chain connector  2ea Φ4*H55mm	Canopy Loop with Collar  1ea @3/8 x 42.4mm x 5mm loop	Nipple  1ea @3/8 x 45mm
Mounting Strap w/ ground screw  1ea 3/4"x4"	Hex Nut  4ea @3/8 x 3mm	Deco Nut (Round)  2 ea 5/32"xH9mm
Circular Mounting Strap  1ea Ø4"*1.5mm	Mounting Screw  2ea 5/32"*H32mm	Screw  2ea 5/32"*H6mm
Nipple (H) w/ Shade Holder  1ea 3/8"*H120mm 1ea Ø53*H5mm	Hex Nut  4ea @5/32"*H3.5mm	Rubber Washer  1 ea Ø53*H2mm
Bottom Cap  1ea Ø102*H34mm	Finial  1ea 3/8"*10MM	Metal Washer  1ea Ø55*H0.8mm
Part Needed _____ Part Needed _____ Reason why _____ Comments _____ ( missing, scratched, broken glass, bent, bad finish)	Quantity _____ Quantity _____	

### FIXTURE ASSEMBLY INSTRUCTIONS

**Read and review installation instruction sheet before assembling the fixture.**

1220-SF RT

#### For Semi-Flush version:

1. Install the fixture Frame to ceiling then continue with Shade installation on Fig 1, Step 9

**NOTE: INSTALL THE SHADE ASSEMBLY AFTER THE FIXTURE IS HUNG.**

For Customer Service, contact the place of purchase to arrange for replacement parts.

# PARTS & ASSEMBLY SHEET

Fixture Name: Empyreal 1220-SF RT

## ASSEMBLING THE FIXTURE as Chain hung (Fig.2)

1. Remove the Circular strap from top of Fixture and replace the long mounting screws with two short screws(O) to hold the Deco nuts (F) in place on the fixture Top cap (E).

2. Feed the fixture wires through the Top loop (P) and pull the wires until taut. Then screw the Top Loop (P) to the coupler in Top Cap until tight.

3. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (K) then remove the excess Chain (K) and discard it.

4. Use one chain connector (L) to attach one end of the chain to the Top loop (J) and close the chain connector.

5. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.

6. Slip Canopy loop collar (H) over the chain, then do the same with the canopy (G).

7. When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop (F) and close the chain connector.

8. Make sure the weight of the chandelier will be supported by the chain-not the electrical wire.

\* You may now install the fixture.

Note: Complete these remaining steps after the fixture is hung.

9. Thread Nipple (H) into Socket Assembly (G), and lock into position by tightening Hex Nut.


10. Install light bulbs in accordance with the fixture's specifications.

11. Slide Shade (I) over Nipple (H) so the Nipple (H) protrudes through bottom of Shade (I), slide Rubber Washer (J), Metal Washer (K) over Nipple (H) and secure with Hex Nut (L)

12. Slide Bottom Cap (M) over the Nipple (H), screw the Finial (N) onto the Nipple (H) until tight.

NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE

Fig 1

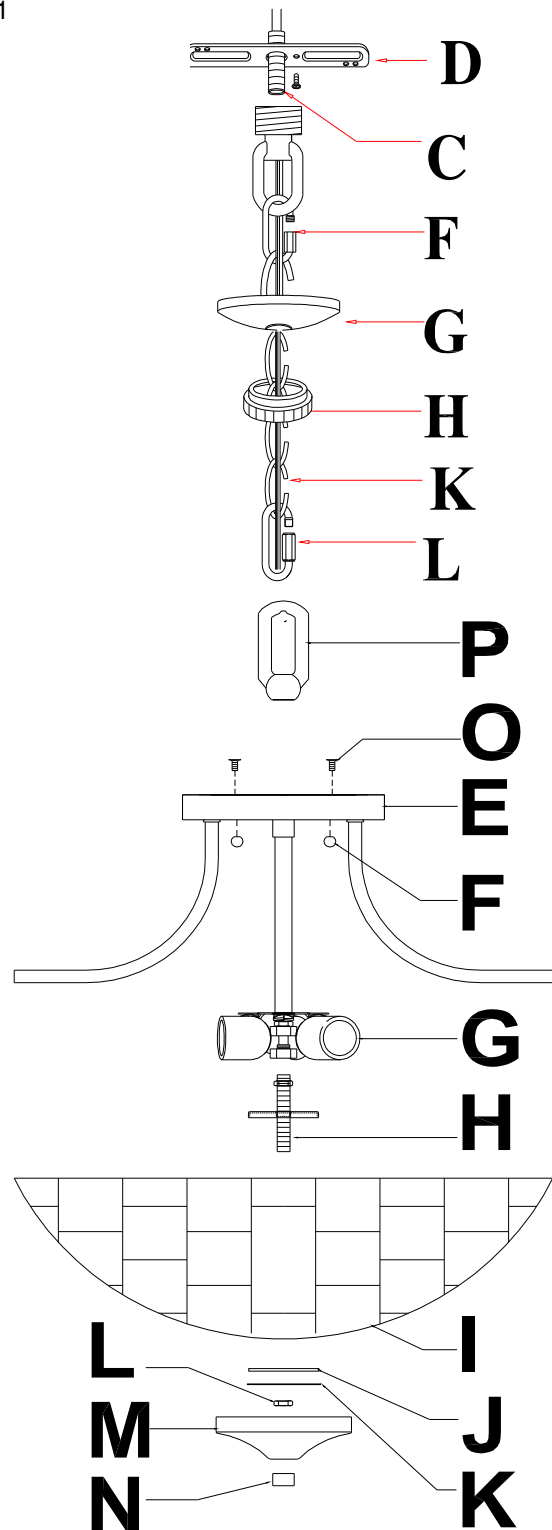

DO NOT put the stone shade in dishwasher.  
To clean - wipe with damp cloth

For Customer Service, contact the place of purchase to arrange for replacement parts.

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE as Pendant (Fig.1)

- Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
- Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
- Thread Nipple (C) into Canopy Loop (F) until snug.
- Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
- Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
- Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten screw securely with screw driver.
- Unscrew the Canopy loop collar (H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
- Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
- Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

### CONNECTING THE WIRES (Fig 2)

- Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  - Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
- Tuck these wire connections neatly into the Junction Box.
  - Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar (H) into the Canopy Loop (F)
  - Install the light bulbs and glass shade as per the fixture assembly sheet.

Fig. 1


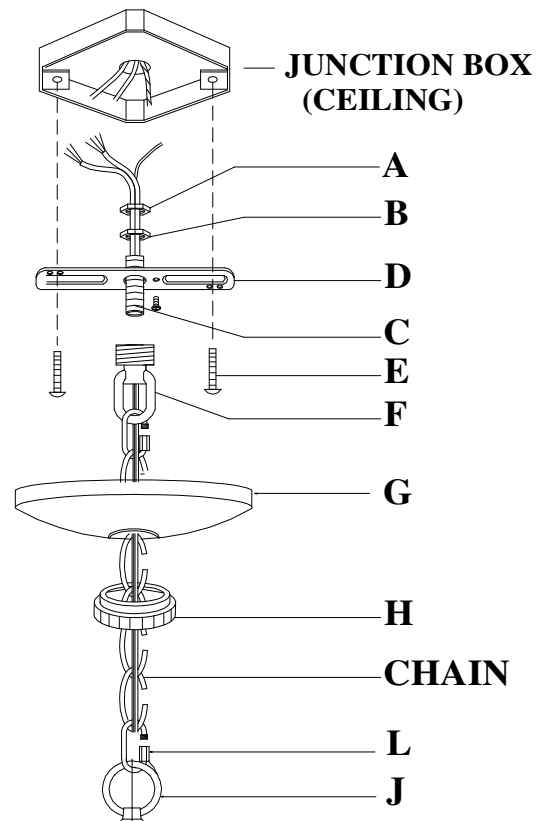


Fig. 2

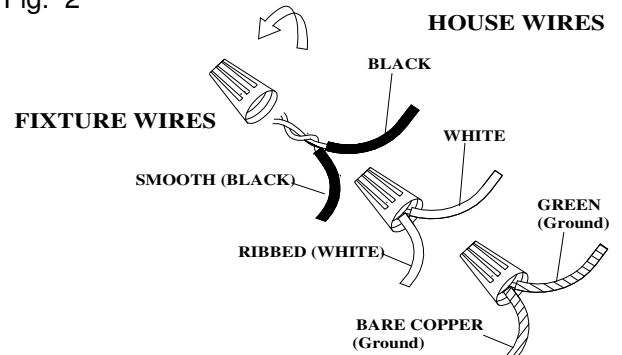

YOUR INSTALLATION IS NOW COMPLETE.  
RETURN POWER TO THE JUNCTION BOX AND  
TEST THE FIXTURE.

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE as Semi-Flush (Fig 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Canopy (E) and thread the two Mounting Screws (A) into the Mounting Strap (B), secure with Hex nuts (D).
4. Place the Mounting Strap (B) over the Junction Box so the Mounting Screws (A) are vertical or horizontal, as required by fixture type.
5. Attach the Mounting Strap (B) to the Junction Box by using the two mounting screws (C). Tighten the screws securely.

### CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attached the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig 3)

9. Place the fixture Canopy (E) over the Mounting Strap (B) and over the Mounting screws (A), so they protrudes through the holes in the Canopy (E).
10. Thread the Deco Nut (F) onto the Mounting screws (A) and continue turning until the Canopy (E) is snug against the wall.
11. Install shade and light bulbs as per the fixture assembly instructions

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING)

