## ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 6482 6483 6484 For Wall Mount Fixture

## WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

## MOUNTING THE FIXTURE

Installation (see fig 1)	Wining (and fig 2)
Installation (see fig.1)	Wiring (see fig.2)
1. Disconnect power at main electrical panel before	1. Connect the electrical wires as follows. Connect the
installation.	Black wire from the fixture to the black house (hot)
2. Thread the two mounting screws about 1/4" into the	Wire. Connect the white wire from the fixture to the white
pre-drilled holes in the mounting plate, spaced about the	(neutral) house wire. Make sure all wire nuts are secured.
same distance apart as the holes in the fixture back plate.	You may wrap the connections with electrical tape. If
Attach the mounting plate to the junction box using two	your outlet box has a ground wire (green or bare copper)
junction box screws. The side of the mounting plate	connect fixture's ground wire to it. Otherwise attach the
marked "GND" must face out.	bare copper fixture wire to the green ground screw on the
3. Guide fixture wires through hole in center of mounting	mounting plate.
plate.	2. Tuck the wire connections neatly into the wall junction
4. Follow wiring instructions carefully (see fig.2)	box.
5. Place the fixture body (A) over the mounting plate,	
aligning the holes with mounting screws, then lock it	
securely with the ball nuts(E).	
6. Attach the glass shade (B) and collar ring(C) to the lamp holder,	
then lock it securely with check ring (D).	
7. Install the light bulbs in accordance with the fixture's	
specifications. DO NOT EXCEED THE MAXIMUM	
WATTAGE RATING!	

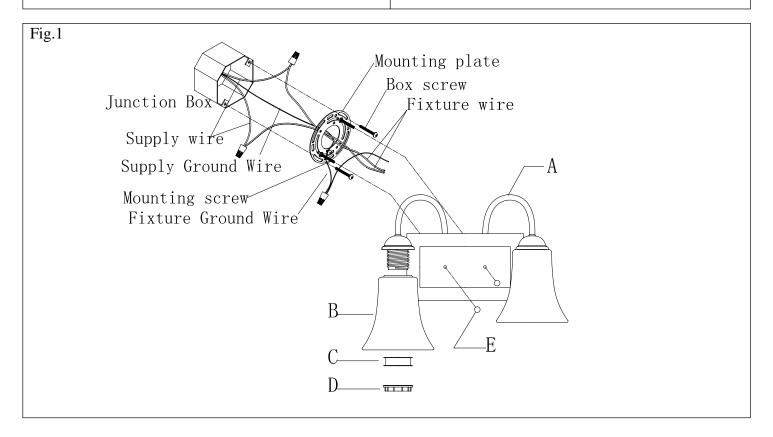


Fig.2 FIXTURE WIRES Black or Smooth	HOUSE WIRES Black (Hot)	FIXTURE WIRES White or Ribbed	HOUSE WIRES White (Neutra	FIXTURE WIRES Bare Copper (Ground) 1) Bar	HOUSE WIRES Green re Copp	or er(Ground)
---	----------------------------------	--	------------------------------------	--	------------------------------------	------------------

