


FILTER REPLACEMENT INSTRUCTIONS - 4000,5000,6000 & 8000 SERIES


AllerAir Industries Inc. Toll Free: 1888-852-8247 Fax: 1-877-688-2193 www.allerair.com

REPLACE THE PRE-FILTER




STEP 1

Make sure the unit is **set to "off"** and the unit is **unplugged**. Lay the unit on its side.



STEP 2

Slowly remove the dirty filter to avoid dispersing its contents. Gently insert it into a plastic bag before discarding.




STEP 3

Insert the new filter by pressing it gently against the sides of the carbon filter inside the unit

These replacement filters will extend the life of your AllerAir unit. Please be sure to follow the instructions for changing the filters in your unit.


We recommend changing pre-filters every two months, HEPA filters every three to five years, and carbon filters every two years.

REPLACE CARBON & HEPA FILTERS




STEP 1

Make sure the unit is **set to "off"** and the unit is **unplugged**. Lay the unit upside down, so that the wheels face up.

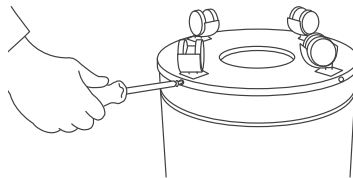


STEP 2

Using a #2 Philips screwdriver, remove the four screws that hold the base onto the unit.




STEP 3

Grasp the wheels. Remove the base by pulling gently on the wheels




STEP 4

Reach inside the unit, and remove the felt pad.



STEP 5

First, **remove the carbon filter**. (pull up gently by placing thumbs on the inner side of the filter)




STEP 6

Then, **remove the HEPA filter** with the same technique.



STEP 7

Now, gently **insert the new HEPA filter**.




STEP 8

Then, **insert the new carbon filter** into the unit.




Step 9

Put back the felt pad removed in **STEP 4**.



Step 10

Replace the base, making sure the arrow on the gold sticker lines up with unit's rear seam.



Step 11

Replace the four screws.



Step 12

Turn the unit back onto its wheels. It is now ready for use.