

Wall Sconces

GENERAL PRODUCT INFORMATION:



This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is suitable for indoor dry locations only.

This product can be dimmed with a standard incandescent dimmer.


CAUTION - RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN THE POWER TO THE **ELECTRICAL BOX OFF.**

Install the Fixture

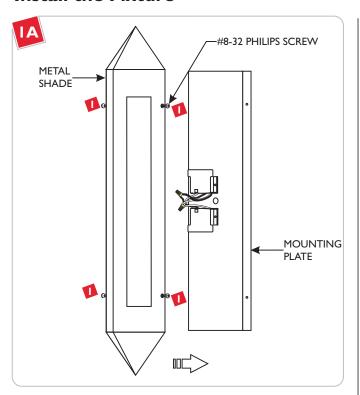



- 1 Unscrew and remove the four #8-32 Philip screws from the metal shade sides.
- Remove the mounting plate.






Mount the crossbar assembly to the electrical box holes with the two #8-32 screws provided.

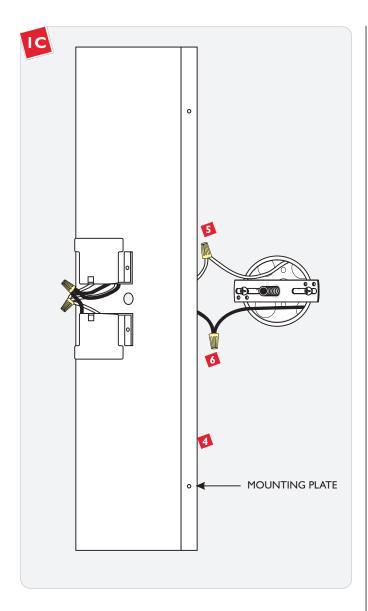




- Connect the fixture white wire to the neutral power line wire with a wire nut.
- Connect the fixture black wire to the hot power line wire with a wire nut.

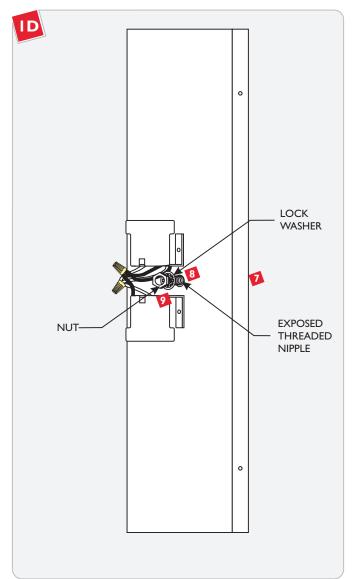

- Place all wires and wire nut connections properly inside the electrical box.
- **18** Level the mounting plate vertically and slide the center hole completely onto the exposed threaded nipple.
- Secure the mounting plate to the threaded nipple with lock washer and nut.


Install the Lamp & Shade

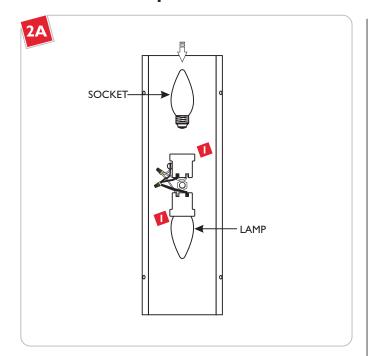

Use **MAX 40** Watt Type B13 Medium Base Torpedo Lamp With Each Socket.



Screw the lamps into the socket.

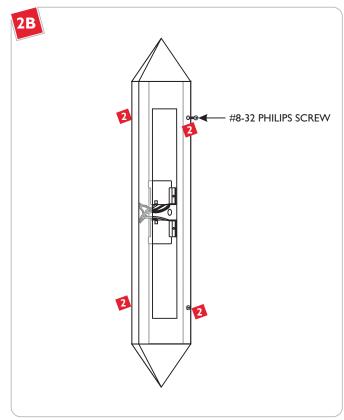

Align the metal shade holes to the mounting plate side holes. Replace and tighten the four #8-32 Philip screws to secure the metal shade in place.

SAVETHESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 800.323.3226 - 847.626.6300

www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company