

Glo-Ball S - Specification Sheet
by Jasper Morrison, 1998

Mounting

| | |
|-----------------------------------|---|
| Lamp (Bulb) Description | 1 x 26W PL G24Q-3 Fluorescent |
| Environment | Indoor - Dry Location |
| Finish | Opal |
| Technical and Product Description | GLO-BALL S pendant lamp providing diffused light. Diffuser consisting of an externally acid-etched, hand blown, flashed opaline glass. Transparent, injection molded polycarbonate diffuser support. 30% fiberglass reinforced injection-molded polyamide rose; pressed and galvanized ceiling fitting. Steel suspension cable. |

Electrical

| | |
|-----------|-----|
| Voltage | 120 |
| Switching | NA |


Physical

| | |
|-----------------------|--------|
| Cord Length (inches) | 145 |
| Construction Material | Glass |
| Weight | 12 lbs |



FU300361 Opal

Dimensional Image

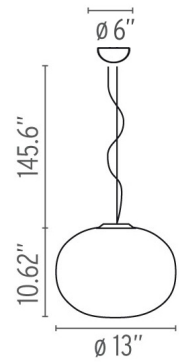

Certifications



Lamping (Bulb)



26W PL G24Q-3 Fluorescent