


**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box using outlet box screws.
3. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
4. Attach canopy to mounting plate with canopy nuts.
5. 3680 - Install candelabra bulbs in sockets. (not included)  
3680F - Install 26W quad CFL G24q-3 base. (not included)
6. Pull glass diffuser holder and turn, as shown in below drawing. insert the inner and outer glass diffusers and replace glass diffuser holder by reversing the steps.
7. Restore power to the fixture.

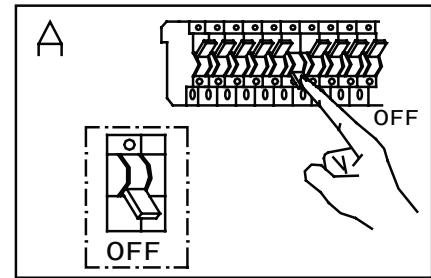

### CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.  
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

