

LEUCOS®

INSTRUCTIONS FOR INSTALLATION - LEUCOS USA

TODD



A1

Enclosed



One installer



Save instructions

Revised
29 January 2004


- WARNING: - Disconnect power before installation.**
- Fixture to be installed by a certified electrician.
 - Install in accordance with the national and local electrical codes.
 - Take great care to avoid scratching or chipping the glass when carrying out the operations below.

1. (Fig.1) Attach plate "A" to the junction box by the four slots "X".
2. (Fig.1) Connect wires. Then place bracket "C" to plate "A" by the threaded holes "Y".
3. (Fig.1) Place the reflector screen "D" to plate "A", guiding it over the bracket "C" and through the four threaded pins "Z" and lock it by the four corresponding thumb screws.
4. (Fig.1) Insert bulb into the lampholder and push the tubes inside the plastic clip "E".
5. (Fig.2) **WARNING: please note that the flaps "L" are assembled by Leucos in their correct location. Be careful never to invert the flaps "L".** Place at first one of the two side flaps "L" into the quad tube "F" with the quad body aligned with the edge and the round body outside it and lock it by the screw "G". Place the glass diffuser with the two side openings "H" (Fig.1) corresponding at the side flaps "L" (Fig.2). Guide the second side flaps "L" inside the glass opening and into the quad tube "F" corresponding. Make a soft pressure in order to guarantee a full contact flaps-glass and lock it by the screw "G".
6. Restore power.

Power : 1x36W 2G 11 TYPE LONG TWIN TUBE



CIRCUIT DIAGRAM:

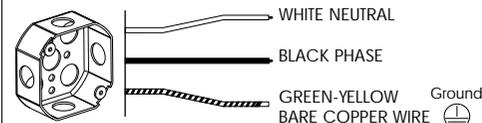

MOUNTS TO STANDARD JUNCTION BOX

For additional information please contact your local dealer or
LEUCOS U.S.A. At:
tel. (732) 225-0010; fax (732) 225-0250

FIG. 1

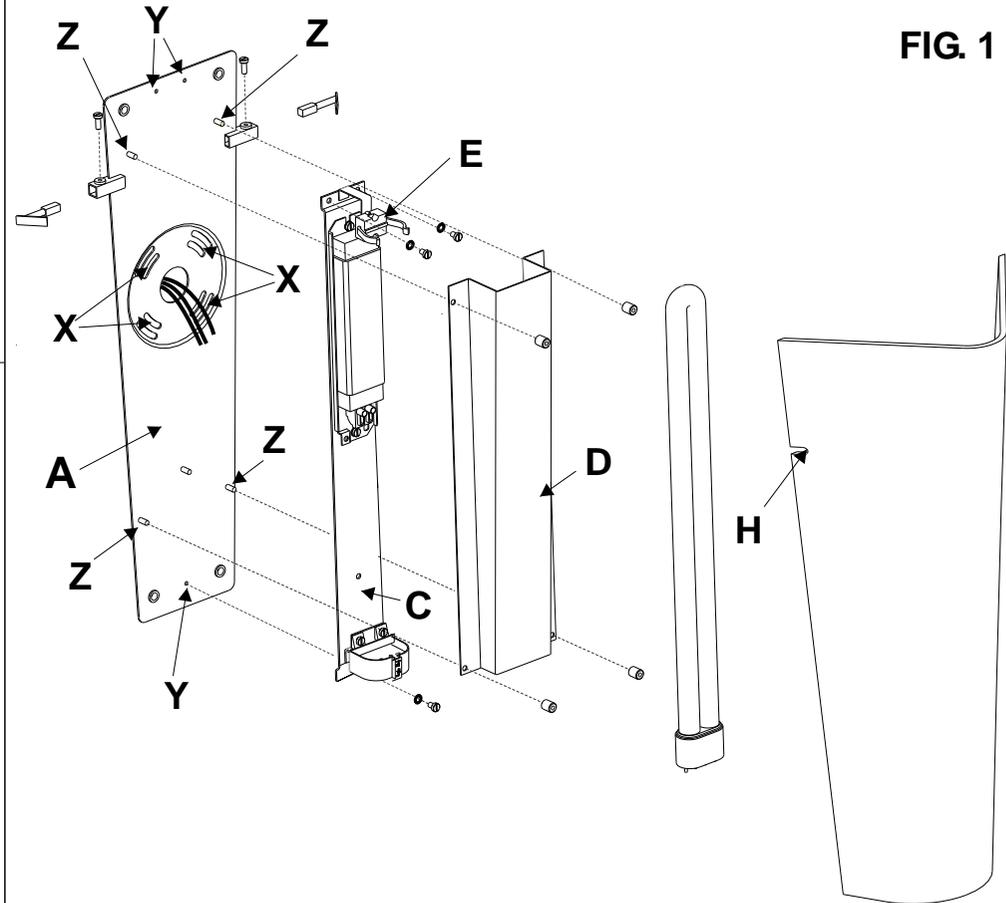


FIG. 3

