


LEUCOS®

INSTRUCTIONS FOR INSTALLATION - LEUCOS USA

MODULO PL 35



Allegato Enclosed A1



Montaggio 1 persona
One installer



Conservare le istruzioni
Save instructions

Indice di edizione
Revised
19 - May - 2004


WARNING:

- Disconnect power before installation.
- Install in accordance with national and electrical codes.
- Follow directions carefully to avoid scratching the glass diffuser.

1. Slip the small bolt on the wire and run the electric wires through the plates "W", "K" and "Y".
2. Attach the plate "Y" to the box "X".
3. Connect the fixture's electrical wires to the supply wire.
4. Fix the plate "K" and "Y".
5. Attach plate "W" to plate "K" and tightly screw the bolt "Q".
6. Install fixture "A" to the ceiling by the three holes provided.
7. Insert glass diffuser "B" on the fixture body "A" and then following ring "C" in the same fixture body. Insert finally the closing ring "D" tightening on the threaded top of the fixture body.
8. Insert bulb.
9. Restore power.

max 1x100W 120V type A-19 

CIRCUIT DIAGRAM:

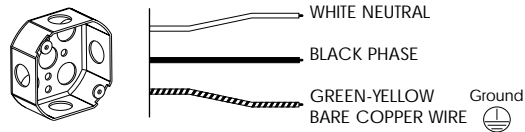

MOUNTS TO STANDARD JUNCTION BOX

For additional information please contact your local dealer or **LEUCOS U.S.A.**
At: Tel. (732) 225-0010 Fax. (732) 225-0250

