

# LEUCOS®

INSTALLATION INSTRUCTIONS - LEUCOS USA

## VIVIA S 19



A1 Enclosed



One installer



Save instructions

Revised  
08 - MAR - 2002


**WARNING:**

- DISCONNECT POWER BEFORE INSTALLATION.
- FIXTURE TO BE INSTALLED BY A CERTIFIED ELECTRICIAN.
- INSTALL IN ACCORDANCE WITH THE NATIONAL AND LOCAL ELECTRICAL CODES.
- TAKE GREAT CARE TO AVOID SCRATCHING OR CHIPPING THE GLASS WHEN, CARRYING OUT THE OPERATIONS BELOW

1. **ILL. 1** Attach the metal canopy "A" to the junction -box.
2. **ILL. 1-2** Guide the electrical wires through the rubber rings "Z" and in one of the 2 lateral holes "E" of the metal cone and the steel wire through the central hole of the canopy "B".  
**PLEASE NOTE: IN ORDER TO PASS THE ELECTRICAL WIRES THROUGH THE CANOPY, IT IS NECESSARY TO PUNCH A HOLE WITH A SCREWDRIVER INSIDE THE CANOPY "B".**
3. **ILL. 3** Slightly loosen the fitting "S". Pass the steel cable through the central hole of the fitting "S". This fitting is pressured fit. In order to secure the steel cable push the fitting toward the top. Having determined the correct height of the fixture, secure the steel cable by screwing the fitting "S". In order to properly secure the steel cable, we suggest passing the steel cable through the fitting "J". Clamp the cable in position with the fitting "J" screw.
4. **ILL.3** Connect the fixture's electrical wires supply wire connectors of the proper size leaving excess wire for decorative "swag" below canopy "B" if desired.  
**NOTE: DURING WIRING TAKE CARE TO GUIDE THE LAMP WIRE THROUGH THE PLASTIC CLAMP "X" AND LOCK IT BY THE SIDE PLASTIC SCREW.**
5. **ILL.2** Slide the canopy "B" up to rest against the ceiling and secure it in position with set screw "H".  
**PLEASE NOTE: USE THE ALLEN WRENCH PROVIDED INSIDE THE CANOPY,**
6. Center fitting "Z" on the steel cable and fit the two electric wires into the appropriate slots.
7. **ILL1-4** Install the glass diffuser "C" onto socket assembly "L". Secure and adjust if needed screws "W".
8. Install the light bulb 1x100 watt medium base recommended.
9. Restore power.


**FOR U.S.A. MARKET ONLY:**

**VIVIA S19** max 1x100W - E26 Type A

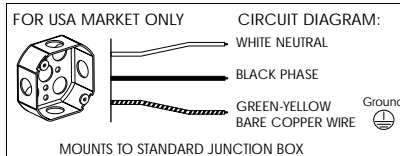


For additional information please contact your local dealer or **LEUCOS U.S.A.** at: Tel. (732) 225-0010 Fax. (732) 225-0250


**ILL.1**

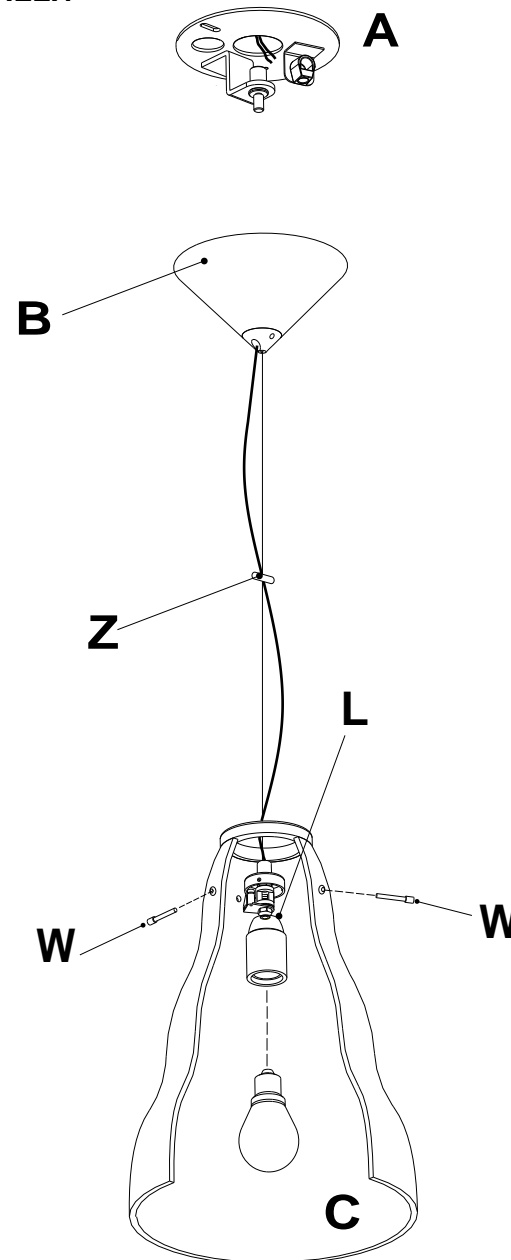


**ILL.2**



**ILL.3**

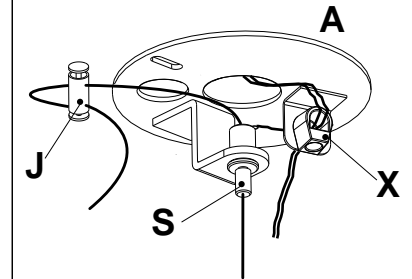

**ILL.4**



**ILL. 5**

