

Rapid Twin Concealed Thermostatic Shower Valve

Barcode	5055369010257
Product Code	RAP3410
Finishes	Chrome
Product Type	Thermostatic Shower Valve
Water Pressure	LP1 - 0.1 bar pressure minimum
Standards	BC254/0207, EN200 and/or WRc/NSF
Requirement	Suitable for all plumbing systems
Guarantee & Aftercare	





During installation extra care must be taken to avoid damaging the fittings. We provide a 20 year guarantee against faulty workmanship or materials (excluding serviceable parts), providing they have been installed, cared for and used in accordance with our instructions.

ADDITIONAL INFORMATION

- Can be fitted vertically or horizontally
- TMV2 Approved

Bar	Flow l/min
0.1	5.5
0.5	14
1	20
2	29
3	44

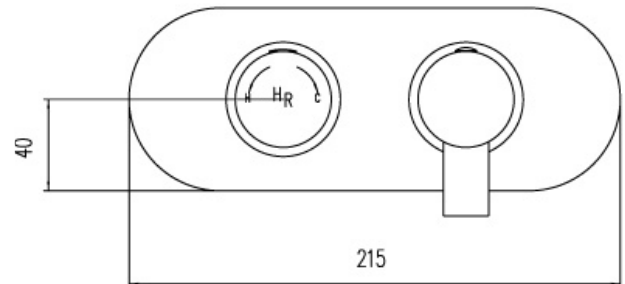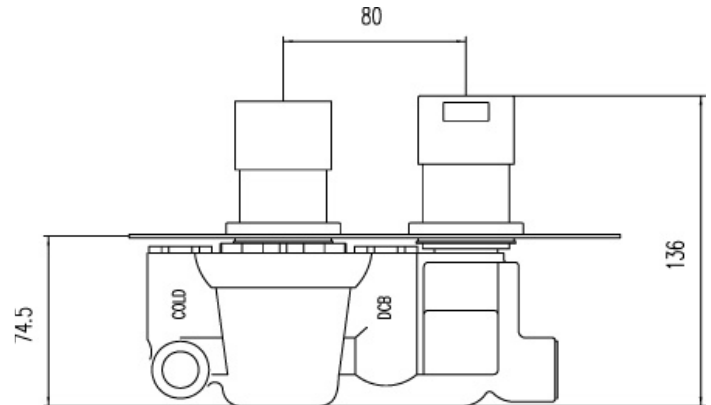

COMPLIANCE: Pending

CUSTOMER CARE:

For further information please call 01282 446789

KEY TO PRODUCT PRESSURE REQUIREMENTS

LP - 0.1 bar min LP2 - 0.2 bar min MP - 0.5 bar min HP1 - 1 bar min HP2 - 2 bar min