


**MAXIMUM LOAD 100LBS (45.4KG)**

www.promounts.com

## Universal Tilt Mount for 24" to 46" flat panels

The UT-PRO200 universal tilt mount is designed for medium sized flat panel displays up to **100lbs (45.4kg)**. The adjustable tilt range is from 0 to 20 degrees and is fixed in place with a ratchet handle that allows tilt adjustment even when in place on the wall. Wall attachment is to two wood studs 16" or further apart or concrete.

- A very slim design only 2" deep yet still allowing ample room for cables
- Universal design; no additional panel adapter needed
- One piece mounting plate with large openings for cable access and J boxes
- VESA compliant: 75, 100, 200, 200 x 100
- All panel and wall mounting hardware included
- Includes security hardware and accepts padlocks
- Manufacturer's limited lifetime warranty

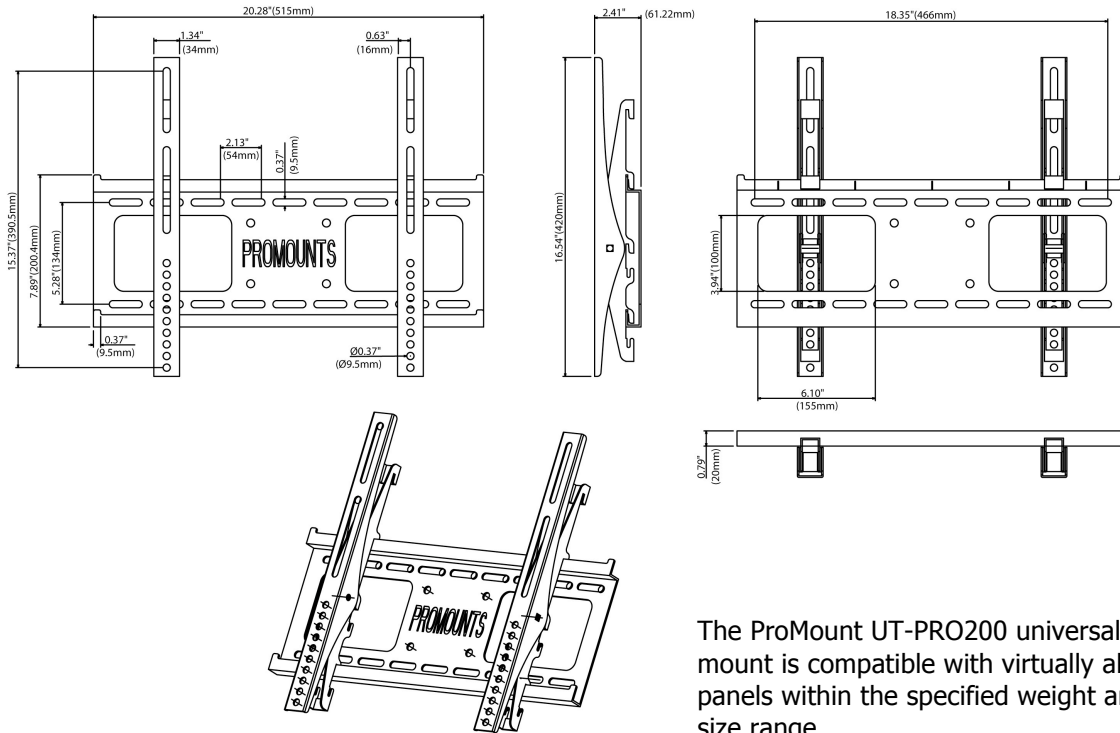

The ProMount UT-PRO200 universal mount is compatible with virtually all flat panels within the specified weight and size range.

## MAXIMUM LOAD 100LBS (45.4KG)

### Specifications

Fits most flat panels between 24" and 46"  
 Horizontal hole spacing: max 18" (457mm)  
 Vertical hole spacing from 2.5" to 15.4"  
 (64mm to 391mm)  
 Tilt: 0 to 20 degrees  
 VESA compliant: 75, 100, 200, 200 x 100

### Weight

12.1lbs (5.5kg)

### Dimensions

8.3" w x 21.5" d x 2.5" h (211mm x 547mm x 64mm)

Architects and Consultants: please contact ProMounts customer service for necessary drawings and files. For complete high resolution images, technical specifications and drawings please visit [www.promounts.com](http://www.promounts.com) and click on Download Center.

**ProMounts:** 5741 Buckingham Parkway, Unit C, Culver City, CA 90230 **Phone:** 866 668 6872, or 310 645 6400  
**Email:** [info@promounts.com](mailto:info@promounts.com) **Fax:** 310 645 0189 **ProMounts** is a division of Scadlock LLC

### Post Assembly Adjustment

Horizontal L or R from center:  
 75 VESA: up to 8" (204mm)  
 100 VESA: up to 7.5" (191mm)  
 200 VESA: up to 5.5" (140mm)  
 Vertical: 2.5" (64mm)

### Wall Mounting

Dual (2) wood studs up to 18" apart or concrete