Imagine



features & benefits


Imagine is a premium, single-sided cassette banner. Features include a ratchet graphic tensioner, self-adhesive slide-in direct-to-roller graphic mounting, universal dual option grippa/self-adhesive slide-in top rail, anti-slip strips along base unit, clip-in integral pole and allen key storage and an EVA molded carrying/ storage bag. Graphic width is 31.5", height is variable- 29.53"-83.85" plus 12" bleed.

Silver: IMG


| hardware specifications | graphic specifications | additional info |
|--|--|-------------------------------|
| Size: 87"h x 33"w | Graphic size is variable 31.5"w x 29.53 - 83.85" (+12" bleed) | Shipping weight with bag: 9.9 |
| We are continually improving and modifying our product range and receive the right to your the aposition without | | |

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE.

Assembly Instructions




Kit includes : base with cartridge, bungee pole set and carry bag




Slide open both pole retainers and remove the bungee pole set from the base




To open, **slide down both** locking tabs on the left and right sides of the base



Lift open the lid and note the 3 grooves inside the base



Place the banner cartridge into the base, ensure the cartridge rod is seated correctly into groove 1 Rotate the cartridge until the remaining rods are seated into grooves 2 and 3

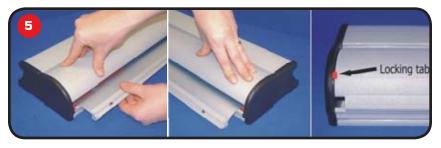

To close, **press down firmly** onto both left and right sides of the lid until an audible click is heard To lock, **slide up both** locking tabs into the position shown above



Assemble the bungee pole and insert into the base



Lean the bannerstand backwards and extend the banner by lifting the top rail until the complete image is visible

Notes

- **Guidelines for Graphic Substrates** 1. Material thickness must be between 225 and 300 microns in total 2. The substrate must be pliable and suitable for roller banner stands 3. After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently
 - 1. For loading graphics into the cartridge refer to separate instuction sheet UIO95
 - 2. Take care when lowering the banner (do not drop) to prevent damage to the graphic.



Finally secure the banner into position by locating the top rail hole with the bungee pole