

The Rocket portable outdoor sign system is particularly suited to pavement advertising.


The base can be filled with water for stability and the spring-loaded graphic support provides the flexibility needed to handle the outdoor elements.

The unit is ideal for fixing die cut rigid substrate graphics for more creative high impact displays.



features & benefits


- Weather resistant
- Single or double-sided option
- Hollow feet for water weighting
- Spring pivot for swing motion
- Maximum graphic area 24" / 600mm wide x 36" / 900mm tall
- Lightweight rigid graphics may be die-cut to

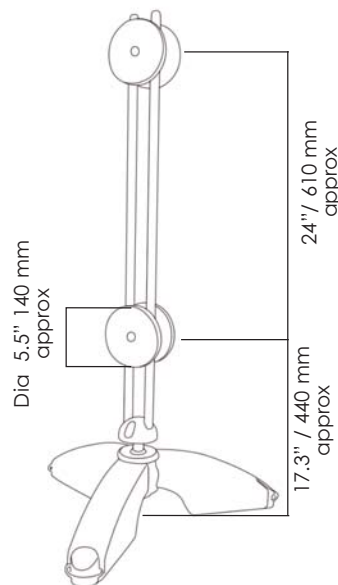

Self-adhesive fixing for single or double-sided graphics

hardware specifications	graphic specifications	additional info
<p>Footprint dimensions (mm) 21.6"/550mm (w) x 21.6"/550mm (d) approx</p> <p>Height without graphic (mm): 45.25"/1150mm approx</p> <p>Weight: 4.4lbs/ 2kg approx when empty and 17.6lbs/ 8kg approx when filled with water. (Feet hold 3 gals/ 6 Litres of water)</p>	<p>Maximum recommended graphic dimensions (mm): 24" / 600mm (w) x 36" / 900mm (h) x 900 (w) approx</p> <p>Recommended Substrate: 1/8" / 3mm thick foam PVC or equivalent</p>	<p>Kit includes: 3 x hollow feet, 1 x Base clamp & fixings, 4 x Self-adhesive rings and 1 x Pole/spring assembly</p> <p>Availability: Dark Grey base with silver/ black fixings</p>

Assembly Instructions

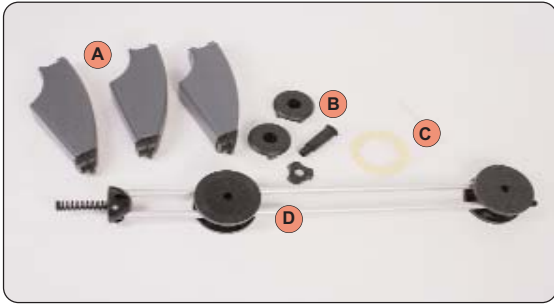

Kit includes: 3 x hollow feet (A), 1 x Base clamp & fixings (B), 4 x Self-adhesive rings (C) and 1 x Pole/spring assembly (D)



1 Unscrew the lid on each foot and fill with water. (approx 1 gal/2 Litres)



2 Slide the foot onto one half of the base clamp. Repeat for the other feet.



3 When all three feet are attached, slide on the other half of the base clamp.



4 Assembled base.



5 Slot the plastic insert over the pole/spring assembly.



6 Slide the pole/spring assembly into the base.



7 Secure the pole/spring assembly to the base using the plastic nut.



8 Peel off the backing paper and mount the self-adhesive rings to the unit.



Simply fasten graphics to the unit using the self-adhesive rings.