




The photograph may not match the reference exactly. Please read the product description to identify the finish.

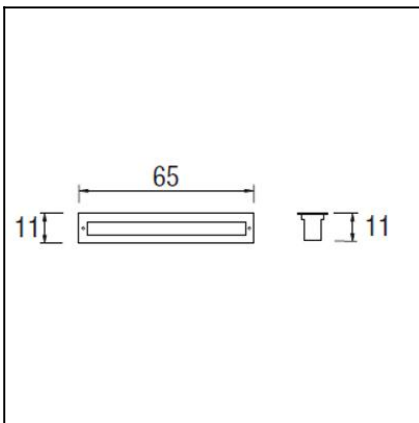


**DESCRIPTION**

May be flush mounted into the ground. Body produced in injected aluminium, with an AISI 304 stainless steel surround and a tempered glass UV protected diffuser. Light source using a +-15° rotatable fluorescent bulb. Available in three sizes depending on model: T5 24W, 39W or 54W. Includes flush mounting box. Its wire outlets on both sides makes it suitable for an array installation.

**TECHNICAL CHARACTERISTICS**

Type:	Uplight
Adjustable $\pm 15^\circ$ on the vertical axis	
IP Protection degrees:	IP67
IK Protection degrees:	IK08
Lampholder:	1 x G5
Power (W):	G5 24W
Voltage / Frequency:	230V/50-60Hz
Units per box:	2
Net Weight (Kg):	5.42
EAN:	8435111049631




**MATERIALS / FINISHES**

**Structure material:** Stainless steel  
 AISI304  
 Extruded aluminium

**Diffuser material:** Glass

**Diffuser finish:** Tempered

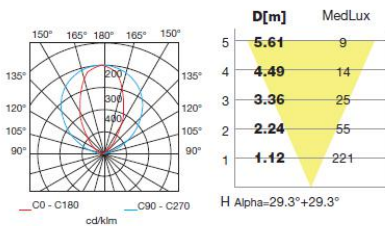

**GEAR**

Gear included: Yes, electronic