




The photograph may not match the reference exactly. Please read the product description to identify the finish.

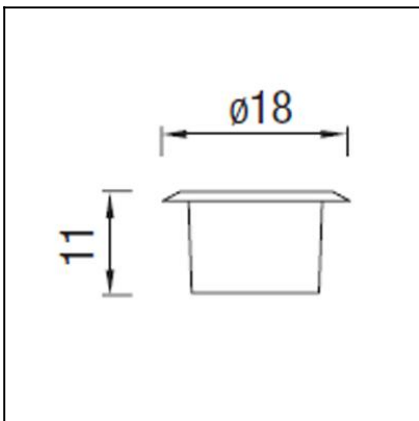

**DESCRIPTION**

May be flush mounted into the floor. Body produced in techno-polymer, with an AISI 304 stainless steel surround and a tempered glass diffuser. For LED or G-53 12V AC halogen light source with a maximum of 75W. Transformer required. 2.5 m lead wire supplied. Its wire outlets on both sides makes it suitable for an array installation.

**TECHNICAL CHARACTERISTICS**

Type:	Uplight
IP Protection degrees:	IP67
IK Protection degrees:	IK08
Lampholder:	1 x G53
Power (W):	G53 MAX 75W
Voltage / Frequency:	12V/50Hz
Units per box:	8
Net Weight (Kg):	1.38
EAN:	8435111059289



**MATERIALS / FINISHES**

<b>Structure material:</b>	Stainless steel AISI304 Technopolymer	<b>Diffuser material:</b> Glass
		<b>Diffuser finish:</b> Tempered

**GEAR**

Necessary equipment not included. For more information check website / catalogs / sales organization.

