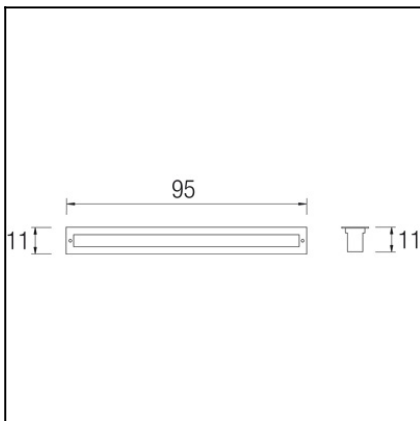





The photograph may not match the reference exactly. Please read the product description to identify the finish.


DESCRIPTION

May be flush mounted into the ground. Body produced in injected aluminium, with an AISI 304 stainless steel surround and a tempered glass UV protected diffuser. Light source using a $\pm 15^\circ$ rotatable fluorescent bulb. Available in three sizes depending on model: T5 24W, 39W or 54W. Includes flush mounting box. Its wire outlets on both sides makes it suitable for an array installation.

TECHNICAL CHARACTERISTICS

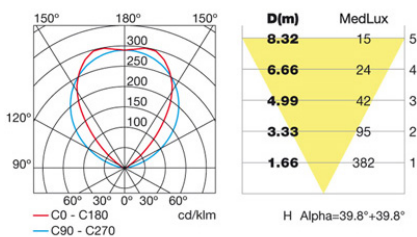
| | |
|--|------------------|
| Type: | Uplight |
| Adjustable $\pm 15^\circ$ on the vertical axis | |
| IP Protection degrees: | IP67 |
| Lampholder: | 1 x G5 |
| Power (W): | G5 39W |
| Voltage / Frequency: | 220-240V/50-60Hz |
| Units per box: | 2 |
| Net Weight (Kg): | 7.74 |
| EAN: | 8435111049648 |


MATERIALS / FINISHES

Structure material: Stainless steel
 AISI304
 Extruded aluminium

Diffuser material: Glass

Diffuser finish: Tempered


GEAR

Gear included: Yes, electronic