




The photograph may not match the reference exactly. Please read the product description to identify the finish.

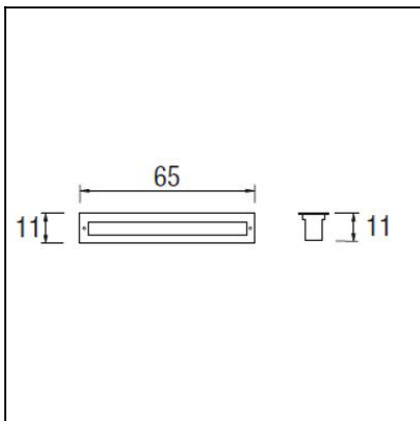


**DESCRIPTION**

May be flush mounted into the floor. Body produced in injected aluminium, with an AISI 304 stainless steel surround and a tempered glass UV protected diffuser. Rotatable (+/-15°) LED light source available in 4.100K LED and RGB LED. 100-240V driver included. Available in three sizes for three different wattages: 12W, 18W and 24W. Its wire outlets on both sides makes it suitable for an array installation. Includes flush mounting box. The RGB version includes a DMX controller.

**TECHNICAL CHARACTERISTICS**

|  |                           |
|--|---------------------------|
| Type:  | Uplight                   |
| Adjustable $\pm 15^\circ$ on the vertical axis |                           |
| IP Protection degrees:                         | IP67                      |
| IK Protection degrees:                         | IK08                      |
| Bulb:  | 12 x LED Philips. Led RGB |
| Power (W):                                     | 1W                        |
| Voltage / Frequency:                           | 100-240V/50-60Hz          |
| Units per box:                                 | 2                         |
| Net Weight (Kg):                               | 6.86                      |
| EAN:   | 8435111084670             |



**MATERIALS / FINISHES**

**Structure material:** Stainless steel AISI304  
Extruded aluminium

**Diffuser material:** Glass

**Diffuser finish:** Tempered

