

# 88 5902 89

## Rio Vista Bar Stool

### IMPORTANT NOTE


Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damages occurring to the parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.

*Home Styles*




### Part List

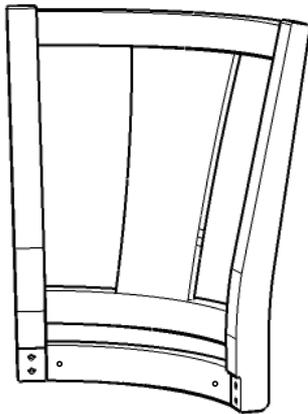

A.  
Back Frame  
1 pc.



B.  
Seat  
1 pc.

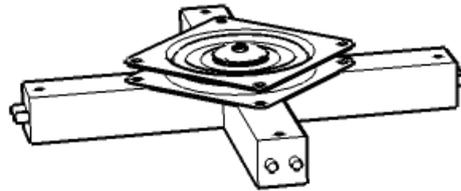

C.  
Base  
1 pc.



D.  
Foot Rest  
1 pc.



E.  
Leg  
4pcs.

### Hardware List



Hex Wrench  
1 pc.



Hex Wrench  
1 pc.



Spring Washer  
14 pcs. (+1 extra)



Flat Washer  
14 pcs. (+1 extra)



Wood plug  
4 pcs. (+1 extra)



Small Hex Wrench  
1 pc.



Head Cap Bolt (short)  
4 pcs. (+1 extra)



Head Cap Bolt (for foot rest)  
4 pcs. (+1 extra)



Head Cap Bolt  
6 pcs. (+1 extra)



Head Cap Bolt (long)  
4 pcs. (+1 extra)

**Home Styles Consumer Assistance Line 888-680-7460 and 877-831-0319**  
**[servicedesk@homestyles-furniture.com](mailto:servicedesk@homestyles-furniture.com)**

**IMPORTANT**

\* You should keep Hex Wrench and in a safe place as you may need to tighten up the Head Cap Bolts in the future.

## STEP 1

Attach 3 Legs (E) to Base (C) with Flat Washers, Spring Washers and Head Cap Bolts (long).

Tighten Head Cap Bolts only half way.

Attach Foot Rest (D) to Legs (E) with Head Cap Bolts (for foot rest). (see Figure 1)

Attach Leg (E) to unit with Flat Washers, Spring Washers, Head Cap Bolt and Head Cap Bolt (long)

Tighten up all Head Cap Bolts.

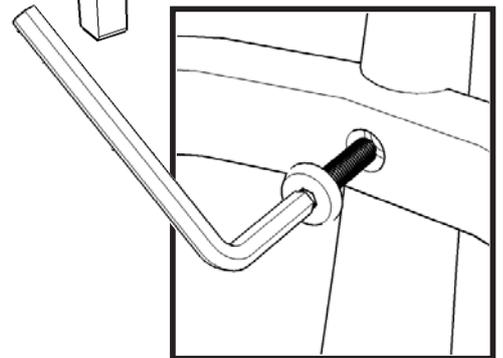
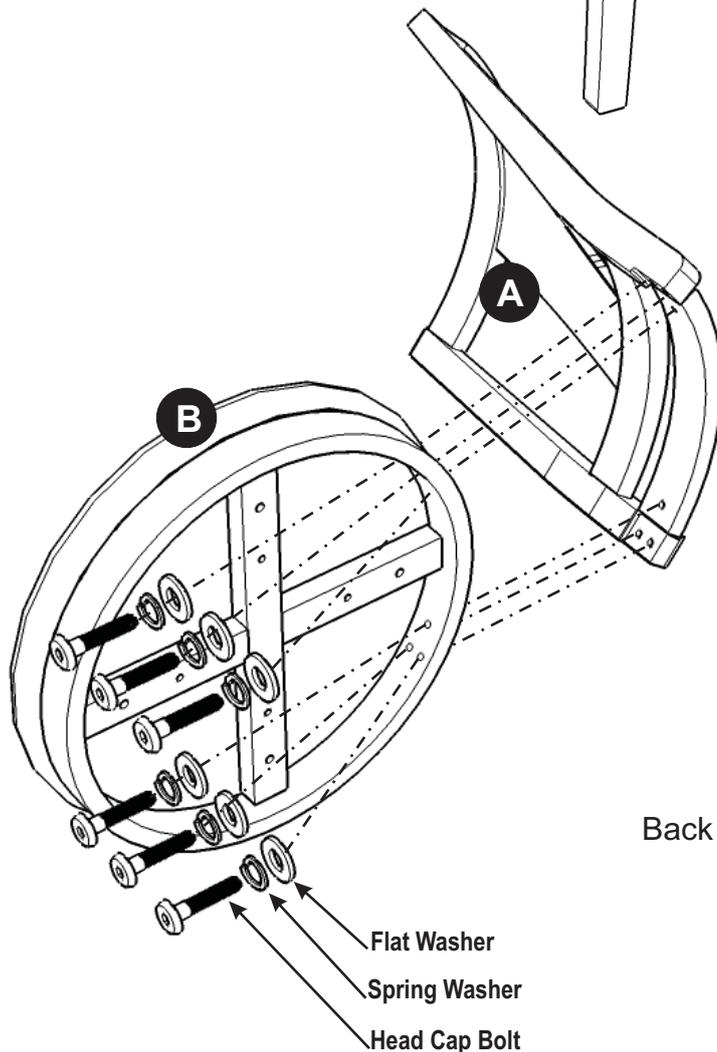
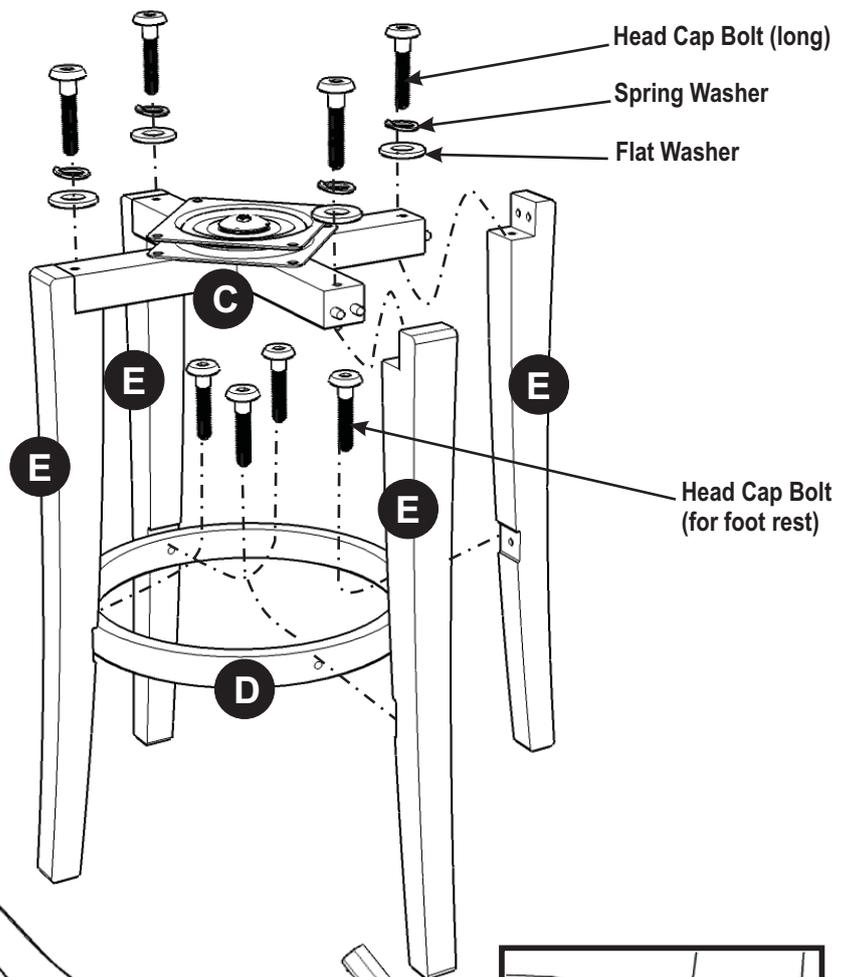


Figure 1

## STEP 2

Attach Seat (B) to Back Frame (A) with Head Cap Bolts, Flat Washers and Spring Washers .

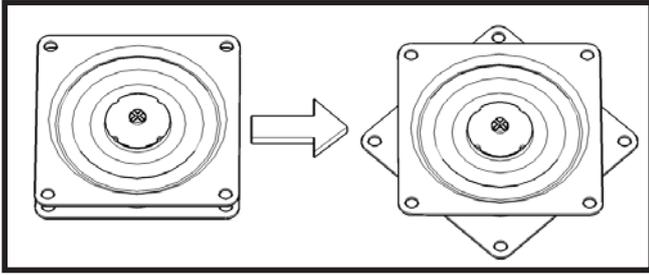


Figure 2

## STEP 3

Rotate the swivel plate (see Figure 2)

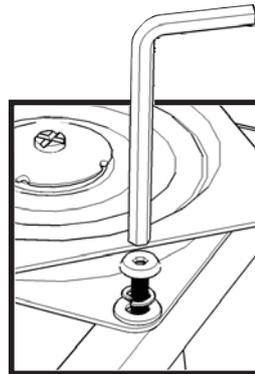
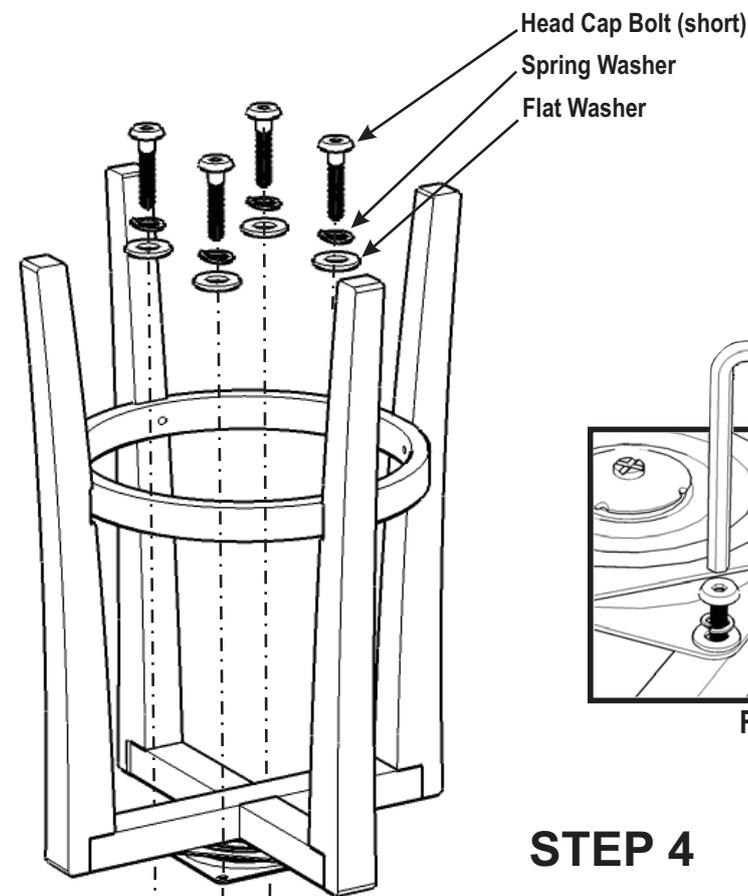
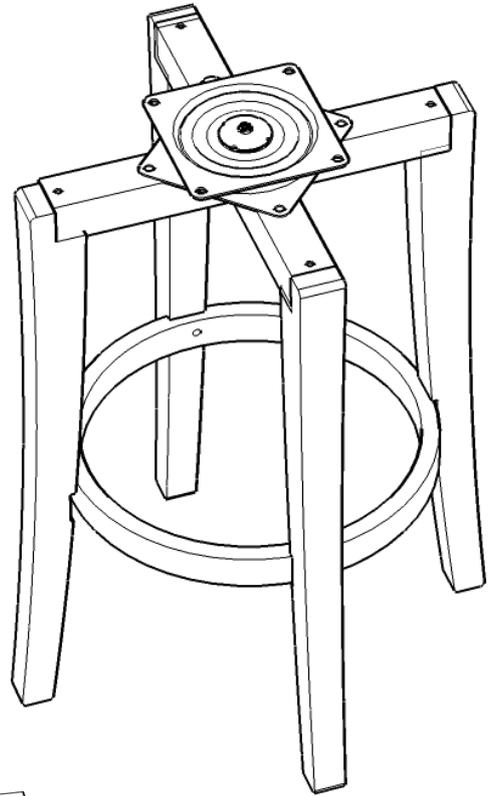


Figure 3

## STEP 4

Turn the Top Unit over and place it on a soft cloth.

Place the Base unit onto the Top Unit and attach it with Flat Washers, Spring Washers and Head Cap Bolt (short). (see Figure 3)

Turn unit over to its' upright position.

Cover all bolt holes in Foot Rest with Wood Plugs.

