

Single-Circuit T~trak™ Adapter With Compact Fluorescent Ballast

700TTCHEDCF_ 1.5

T~TRAK

SYSTEM CONNECTORS

GENERAL PRODUCT INFORMATION:




This product is suitable for indoor dry locations only.

This product is intended for use only with Tech Lighting Single-Circuit T~trak™ system.




Install the Compact Fluorescent Adapter

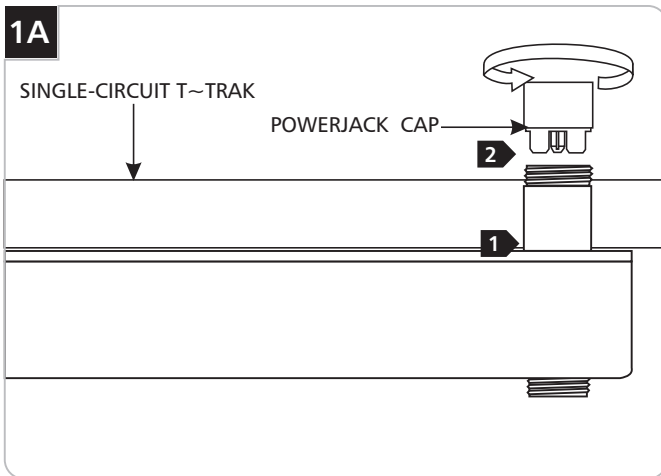

NOTE: Turn off power to Single-Circuit T~trak before installing the compact fluorescent adapter.

- 1** Install the compact fluorescent adapter over the Single-Circuit T~trak.
- 2** Line up the PowerJack cap with the compact fluorescent adapter and screw them together. Make sure not to cross thread.

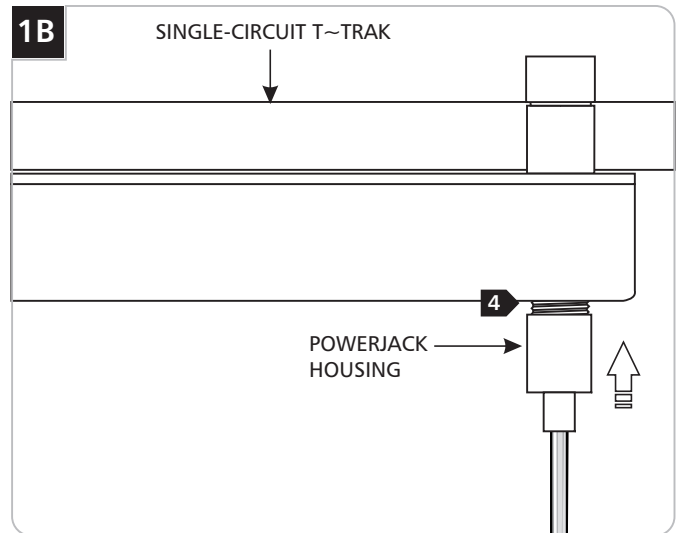

NOTE: Use **MAX 35** watt fluorescent fixture with the Single-Circuit T~trak compact fluorescent adapter.

- 3** Line up and mate the socket contacts with the compact fluorescent adapter contacts.
- 4** Slide the PowerJack housing up and tighten it to the compact fluorescent adapter.

NOTE: In case of cross threading, unscrew the PowerJack housing from the compact fluorescent adapter and repeat steps 1 and 2.

SAVE THESE INSTRUCTIONS!

T~TRAK
a brand of **TECH LIGHTING**

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.ttraklighting.com

© 2010 Tech Lighting, L.L.C. All rights reserved. The "T~trak"™ graphic is a registered trademark of T~trak™. T~trak™ reserves the right to change specifications for product improvements without notification.
A Generation Brands Company