

T~TRAK

SYSTEM CONNECTORS

GENERAL PRODUCT INFORMATION:




This product is suitable for indoor dry locations only.


This product is intended for use only with Tech Lighting Two-Circuit T~trak™ system.



Install the CMH Adapter

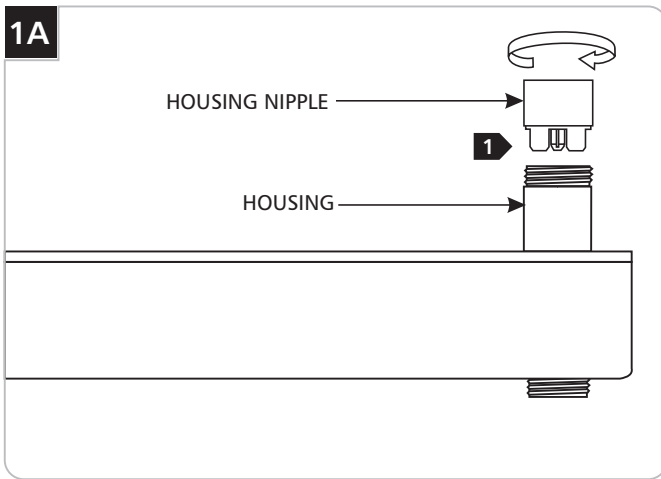


1 Unscrew the housing nipple from housing.

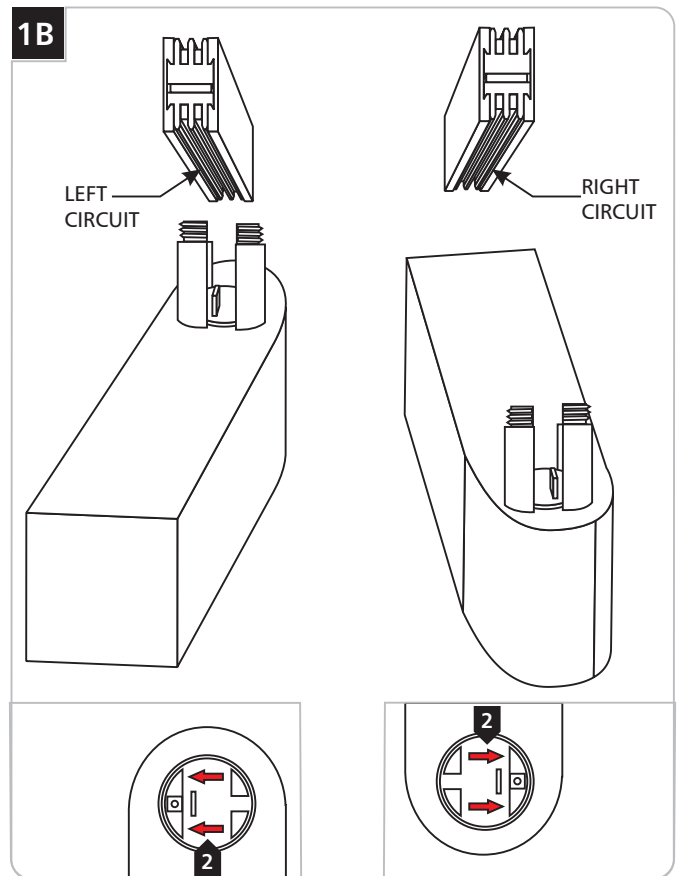


2 The arrow on the CMH adapter indicates from which circuit the fixture will be energized.

3 Rotate the CMH adapter to pick one of the circuits.

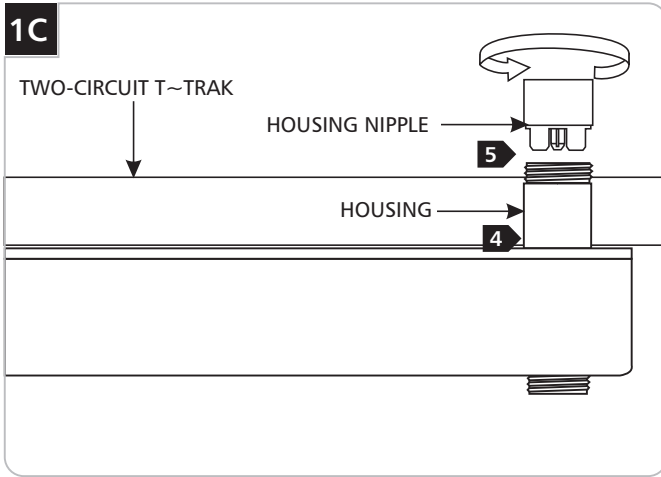

NOTE: Turn the power to the Two-Circuit T~trak off before installing the CMH adapter.

- 4 Install the CMH adapter housing over the Two-Circuit T~trak.
- 5 Line up the housing nipple with the CMH adapter housing and screw them together. Make sure not to cross thread.

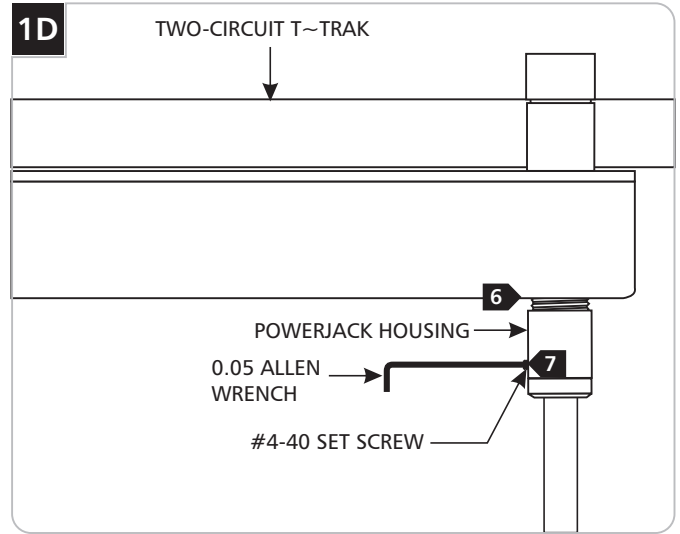

- 6 Line up the fixture PowerJack housing with the CMH adapter and screw them together. Make sure not to cross thread.
- 7 To lock the fixture head in a permanent horizontal position, tighten the #4-40 set screw on the PowerJack housing with the provided 0.05 Allen wrench.

SAVE THESE INSTRUCTIONS!

T~TRAK
a brand of **TECH LIGHTING**

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.ttraklighting.com

© 2010 Tech Lighting, L.L.C. All rights reserved. The "T~trak" graphic is a registered trademark of T~trak™. T~trak™ reserves the right to change specifications for product improvements without notification.
A Generation Brands Company