



4" Round Power Feed Canopy

DUAL-FEED

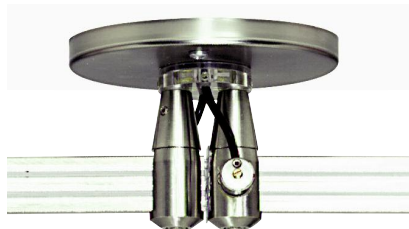

Shown approx. 35% actual size.



mo2_4rnd_df_canopy_spec.pdf

DESCRIPTION

A dual-feed canopy is mounted to the ceiling above the Two-Circuit MonoRail run. It brings power to the Two-Circuit MonoRail run from a two-circuit remote transformer (sold separately). The low-voltage leads from the remote transformer are connected to the canopy leads inside the junction box. Isolating connectors are included to isolate power feeds from each other. This canopy provides a total of four independent circuits.

INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included).

FINISH

Antique bronze, chrome, satin nickel, black, white. Black and white finish have satin nickel feeds.

USAGE

For use with a dual-feed Two-Circuit MonoRail remote transformer (sold separately).

COMPATIBLE RIGID STANDOFFS

The shortest rigid standoff that can be used with a Two-Circuit MonoRail dual-feed canopy is the 2" rigid standoff (sold separately). If dropping the rail more than 2" below the ceiling, order the desired rigid standoff length and two compatible power extenders (sold separately).

WEIGHT

0.95 lb./0.43 kg. ±

ORDERING INFORMATION

700MO2P4C402

FINISH

- Z ANTIQUE BRONZE
- C CHROME
- S SATIN NICKEL
- B BLACK
- W WHITE



7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

www.techlighting.com

700MO2P4C402 _____

FIXTURE TYPE: _____

JOB NAME: _____

