



GENERAL


- To insure the success of the fixture installation, the following instructions and diagram(s) should be read and understood.
- All electrical connections must be made in accordance with the National Electric code and local codes and ordinances.
If you are uncertain of the methods of installing electrical wiring and lighting fixtures secure the services of a qualified licensed electrician.
- TOOLS NEEDED:** Blade screwdriver, slip joint pliers, wire cutter/stripper, electrical current tester, stepladder and electrical tape.
NOTE: The important safeguards and instructions outlined on this sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and maintaining this lighting fixture.

INSTALLATION PREPARATION

- TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS TO BE ATTACHED.**
Move the appropriate circuit breaker to the "off position" or completely remove the fuse controlling the circuit..
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached.
DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING.
In regular circumstances the BLACK wire will be the "Hot" lead and the WHITE wire will be the "Neutral" or "Common" lead. A GREEN or BARE COPPER wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.
- This fixture is designed to be mounted on a standard round or octagon box. The box must be securely mounted to the structure of the building.

FIXTURE INSTALLATION

- Remove the fixture and parts bag(s) from the carton.
Before discarding the carton, double check packing to make certain that all parts are found.
- Thread the screws into the crossbar. Thread the hex nuts onto the screws.
- Attach the adjustable crossbar (the green ground screw should face out), to the outlet box.
- Place the fixture onto the screws. Adjust the screws so that 3/16" extends beyond the back of the fixture. Lock the screws in place by tightening the hex nuts against the crossbar.
- Fasten the bare copper fixture wire to the green or bare copper wire in the box or fasten it to the crossbar with green screw provided.
NEVER FASTEN THE GROUND WIRE TO THE BLACK OR "HOT" WIRE ! FAILURE TO FOLLOW THIS INSTRUCTION COULD RESULT IN SERIOUS INJURY OR DEATH!

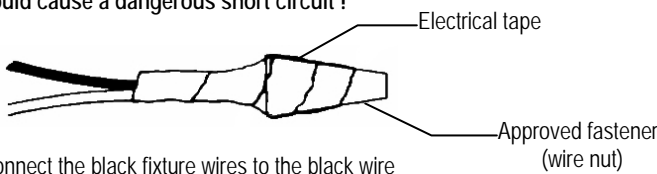

- Connect the black fixture wires to the black wire in the outlet box. Fasten the joined wires as in step 6.
- Place the fixture over the outlet and fasten it with the end balls.
- Remove the ring(s) from the socket(s). Install the glass and replace the ring(s).
- Install the lamp(s) (light bulb(s)).
NOTE: This fixture is rated for 60 watt type B, BA, C or CA lamp(s).
DO NOT EXCEED RECOMMENDED WATTAGE !
- Restore power to circuit at breaker or fuse box.

