


Your box should contain the following parts:

1. J-box Mount Kit
2. Pigtail mount with screws
3. Body
4. Front
5. Two plastic diffusers


BLISS

26-38-50

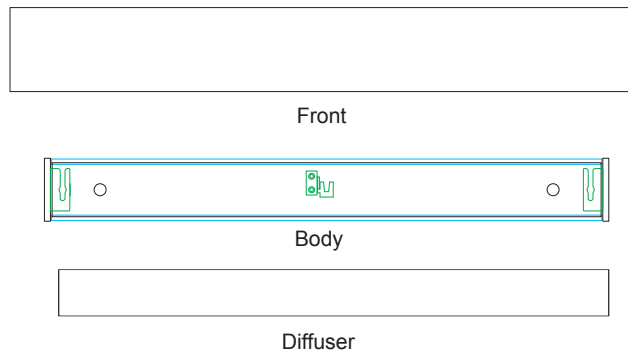


Installation Instructions Mounting to J-box




1. Locate the zip-loc bag that contains the J-box mount kit.
2. Choose the appropriate size mounting plate for your application. You will need only one mount plate per fixture. The extra plate can be discarded.
3. Assemble the mount kit as follows: (a) screw a hex nut onto the bottom of the nipple (b) slide a star washer over the nipple and let it rest on the washer (c) slide the mount plate over the nipple using the center hole and let it rest against the star washer (d) slide the other star washer over the nipple and let it rest against the mount plate and (3) secure the assembly with another hex nut. (See Fig. A)
4. Attach the mount kit to the J-box. Make sure to align the mounting holes parallel to the direction the fixture will be hanging.
5. Connect the wires from the fixture to the corresponding wires from the J-box. Push the connections back into the J-box.
6. Thread the nipple through the center mounting hole on the fixture.
7. Secure fixture to mount kit with remaining hex nut.
8. It is recommended to secure the fixture to the wall using appropriate, customer-supplied screws through the additional mounting holes at each end of the fixture.



Align mounting holes parallel to the direction the fixture will be hanging

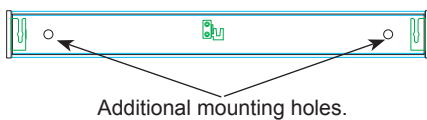

9. Install front plate by loosening the nuts on the studs on the back side of the plate and slipping the studs into the slots in the brackets.
10. Secure by tightening the nuts.

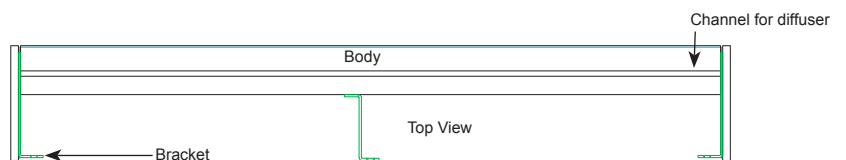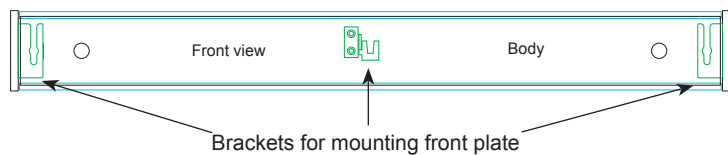

11. Install lamping.
12. Install top and bottom diffusers by snapping the ridge on the plastic diffuser into the channel at the rear of the fixture, working from one side to the other.


BLISS

26-38-50

Installation Instructions

Direct-to wall

1. Locate the pigtail mount plate with screws.
2. Thread conduit end connector (customer supplied) and wires through center hole in pigtail mount plate.
3. Secure with hex nut.
4. Connect wires from fixture to corresponding wires from conduit. Push connections back inside fixture.
5. Secure pigtail mount plate to fixture using the screws provided.
6. Mount fixture to wall with appropriate, customer-supplied screws using holes located on either end of fixture.
7. See steps 9 -12 on J-Box mounting instructions for installation of front cover and plastic diffusers.

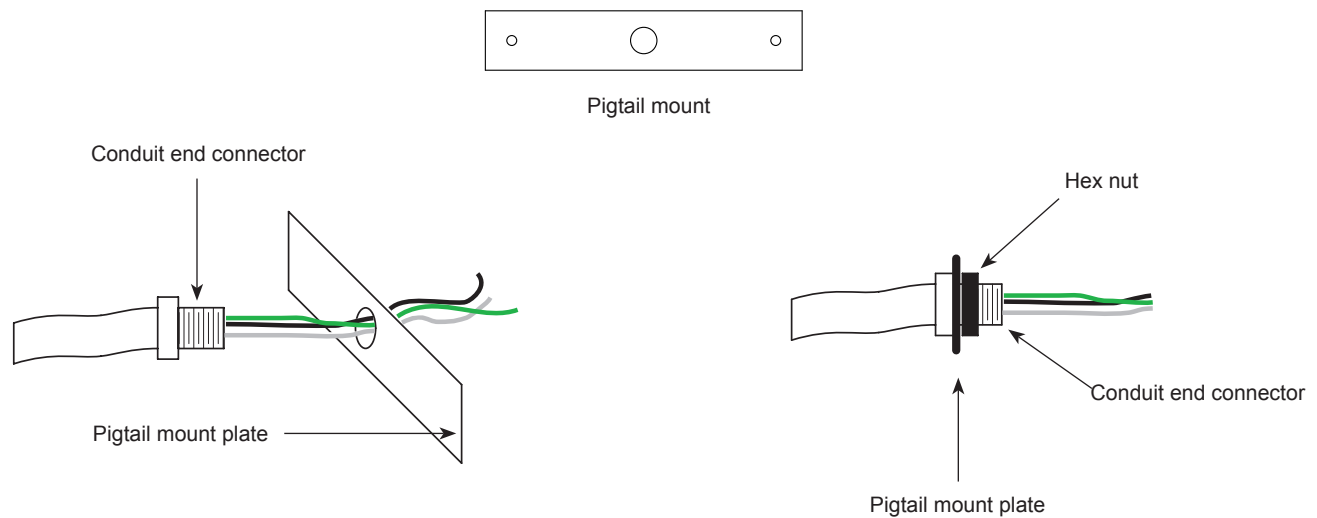

Lamping:

Bliss 26:	24W T5 HO - Mini Bi-Pin base
Bliss 38:	39W T5 HO - Mini Bi-Pin base
Bliss 50:	54W T5 HO - Mini Bi-Pin base