


BLISS



13

Installation Instructions


1. Remove the mounting plate by unscrewing the two screws holding it to the body of the fixture.
(The slot in the front bracket allows access for a screw driver.)

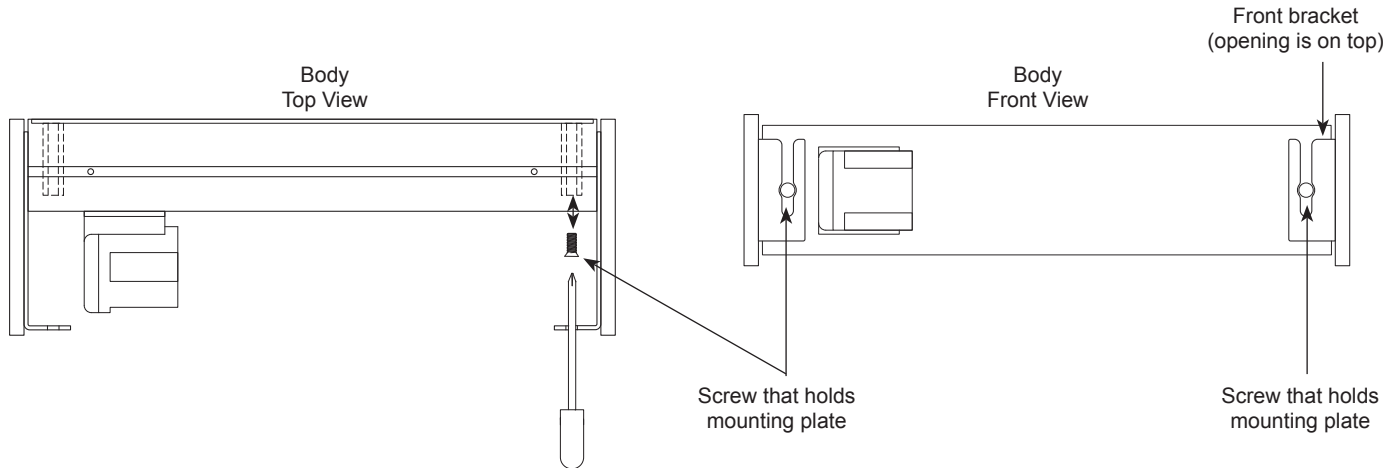


2. Pull the wires from the J-box through the wire hole in the mounting plate and attach the plate to either the wall or J-box with the stand-offs pointing out. If the mounting screws on your J-box are horizontal and level, the mounting plate can be attached directly to the J-box. If the J-box does not allow for horizontal and level mounting, attach the mounting plate directly to the wall with screws appropriate for wall surface.

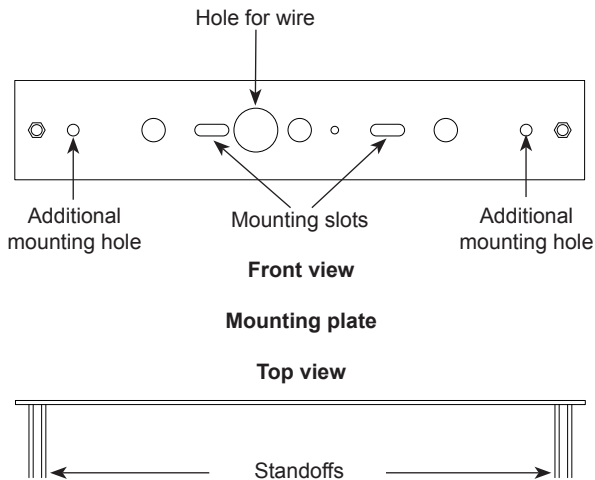

3. Connect wires from J-box to corresponding wires from fixture and push connections back into the J-box.
4. Slide the fixture back over the standoffs on the mounting plate and secure with screws removed in Step 1.
5. Install lamping.
6. Install front plate by loosening the nuts on the studs on the back of the plate and sliding the studs into the slot in the front brackets.
7. Secure by tightening the nuts.

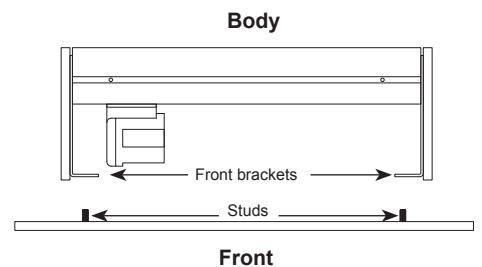

8. Install glass diffuser on top and bottom of fixture with screws provided.

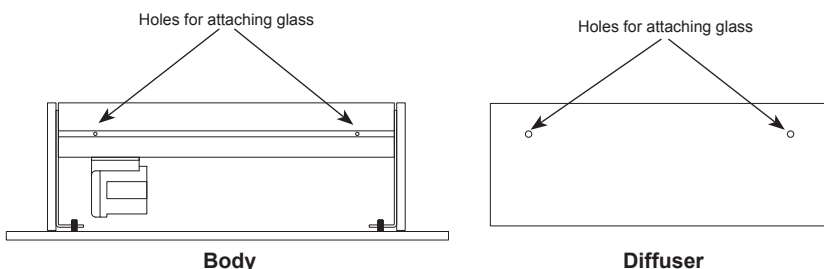

Lamping: 42W T4 Hex Tube - Gx24q-4 base

