

Float L-C ceiling


James Irvine

Ceiling mounted luminaire for direct and indirect diffused fluorescent lighting.

- body in extruded and die-cast aluminum with white lacquered finish
- upper, indirect light emission diffuser in clear polycarbonate with optional blue or topaz colored filters
- lower, direct light emission diffuser in opaline polycarbonate
- ceiling canopy in white molded thermoplastic and steel, incorporating fluorescent ballast
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballasts (277V optional)
- mounts directly to rigid ceiling surface (hardware by others) over standard electrical junction boxes

LISTING ceiling
Underwriters Laboratories Inc. ©
File E141211

Intertek ETL suspension
Report No. 3020854L57

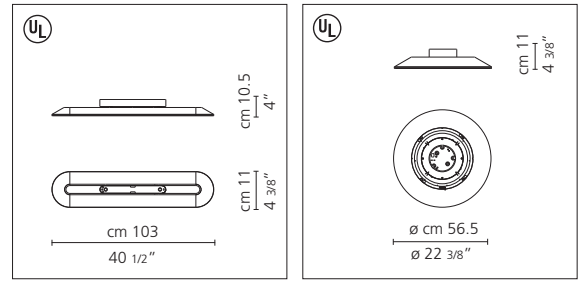

Float L ceiling

fluorescent source

- 1x39W (G5/T5 HO).....
- 2x39W (G5/T5 HO).....
- 2x54W (G5/T5).....

Float C ceiling

fluorescent source

- 1x55W (2GX13/T5 circline).....

