

# Logico suspension Logico mini suspension Logico micro suspension Logico nano suspension Logico nano track

Michele De Lucchi, Gerhard Reichert

Suspension mounted luminaires for diffused incandescent lighting for applications with a single diffuser unit or with an assembly of three, four, or five diffuser units in a linear or nested configuration. Logico nano track mounted suspension luminaire for diffused incandescent lighting.

- diffuser(s) in handblown glass with satined finish
- diffuser(s) supporting frame in die-cast aluminum with pale grey matte lacquered finish
- frame supporting cables in stainless steel
- ceiling canopy in steel with pale grey thermoplastic cover
- mounting to standard electrical junction boxes and with provision for additional concealed ceiling fastening for triple configurations
- mounting to Lightolier or Halo track for Logico nano track



Logico suspension single



Logico suspension triple linear



Logico suspension triple nested



Logico mini suspension single



Logico mini susp. triple linear



Logico mini susp. triple nested



Logico mini susp. quadruple nested



Logico micro suspension single



Logico micro susp. triple linear



Logico micro susp. triple nested



Logico micro susp. quad. nested



Logico nano suspension single




Logico nano susp. quintuple linear



Logico nano track

## Logico suspension

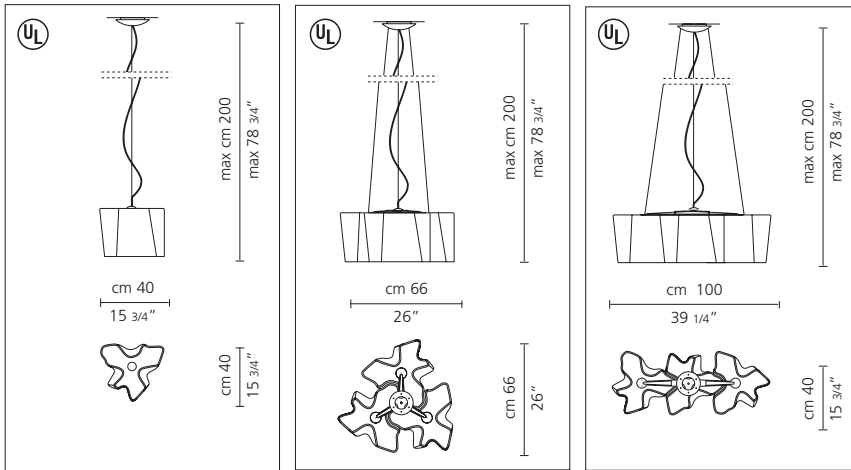


Logico suspension single

Logico suspension triple nested

Logico suspension triple linear

- |  |  |  |
|--|--|--|
| incandescent source<br>• 1x150W (E26/A21)..... | incandescent source<br>• 3x150W (E26/A21)..... | incandescent source<br>• 3x150W (E26/A21)..... |
| or   | or   | or   |
| • 1x150W (A26/G40).....                        | • 3x150W (E26/G40).....                        | • 3x150W (E26/G40).....                        |

## Logico mini suspension

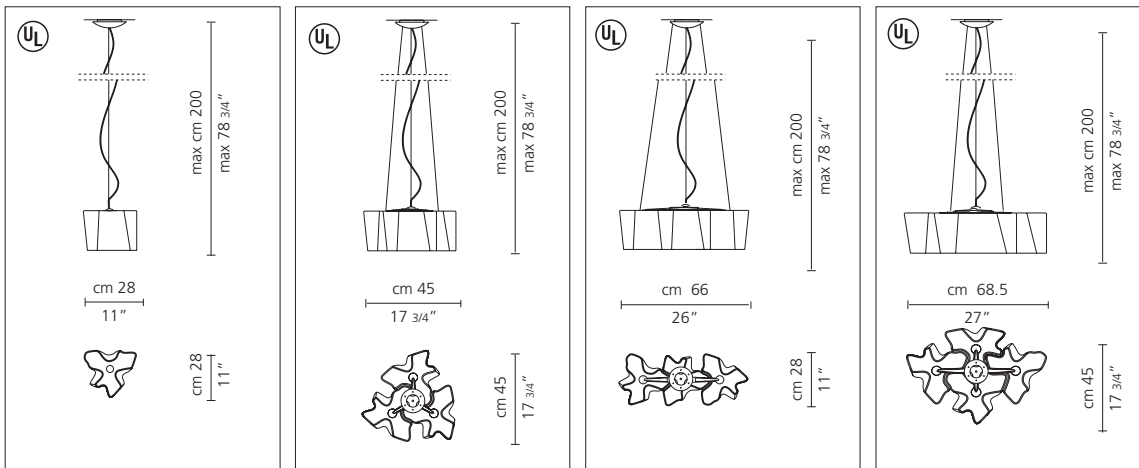

Logico mini suspension single


Logico mini suspension triple nested

Logico mini suspension triple linear

Logico mini susp. quadruple nested

- |  |  |  |  |
|--|--|--|--|
| incandescent source<br>• 1x100W (E26/A19)..... | incandescent source<br>• 3x100W (E26/A19)..... | incandescent source<br>• 3x100W (E26/A19)..... | incandescent source<br>• 4x100W (E26/A19)..... |
| or   | or   | or   | or   |
| • 1x100W (E26/G25).....                        | • 3x100W (E26/G25).....                        | • 3x100W (E26/G25).....                        | • 4x100W (E26/G25).....                        |


Logico micro suspension

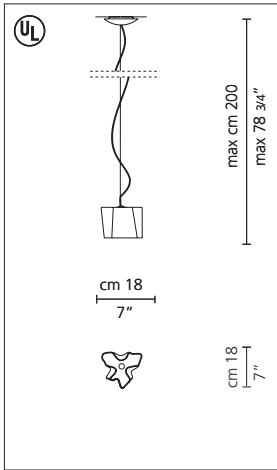

Logico micro suspension single

incandescent source


• 1x60W (E12/G161/2).....

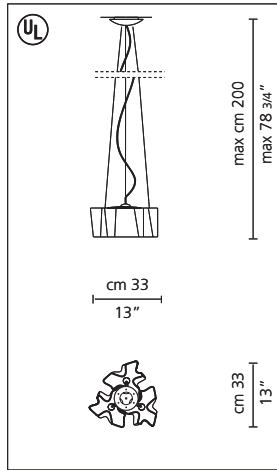

Logico micro suspension triple nested

incandescent source


• 3x60W (E12/G161/2).....

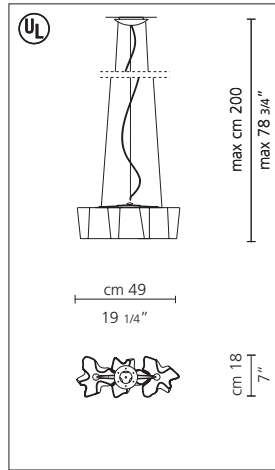

Logico micro suspension triple linear

incandescent source

• 3x60W (E12/G161/2).....

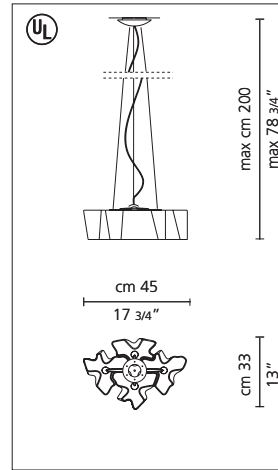


Logico mini susp. quadruple nested

incandescent source

• 4x60W (E12/G161/2).....


Logico nano suspension

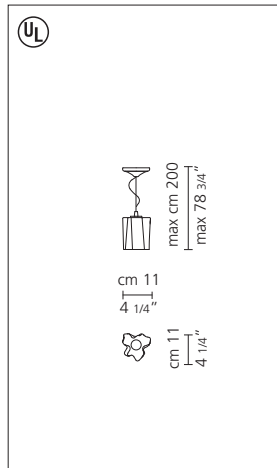

Logico nano suspension single with ceiling canopy or track adaptor

incandescent source

• 1x60W (E12/G161/2).....

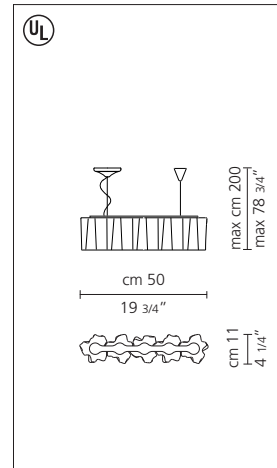

Logico nano suspension quintuple linear

incandescent source

• 5x60W (E12/G161/2).....

