

MUSE

FR40606BKS



Bulbs: 60W G16-1/2 CAND .

Replacement Parts: GLASS: R40600MIR; R40600PAL

ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the body of the fixture, installing the mounting hardware to the junction box, making all necessary electrical connections, hanging the fixture and then installing the fixture glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1


- 1 Slip loop (1) along wire and thread onto thread tube (2) and tighten.
- 2 Fixture can be installed at this point.

STEP 2 Refer to *Hanging Instruction Sheet [FRIS19]* to hang fixture. Then refer back to this sheet to continue installation of this fixture.

STEP 3

- 1 Remove ring (7) and spacer (6) from socket (3) - See Drawing 1.
- 2 Slip mirrored glass (4) over socket followed by opal glass (5).
- 3 Slip spacer (6) and thread ring (7) onto socket (3) adjust glass till straight and tighten socket ring (3) to secure glass.
- 4 Fixture can now be lamped accordingly.

[DRAWING 1]

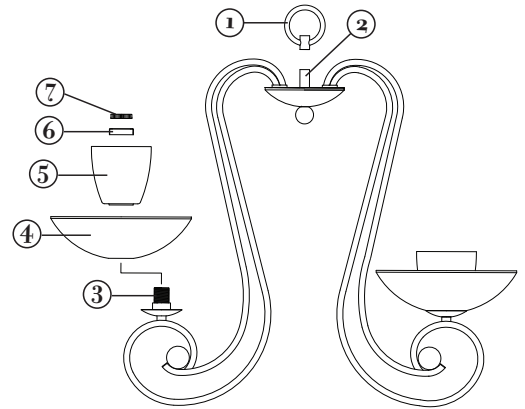

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

06.01.11