



GENERAL PRODUCT INFORMATION:




This product is suitable for indoor dry locations only.




NOTE: MAX Load 50W per port.

Install the MonoPoint Canopy

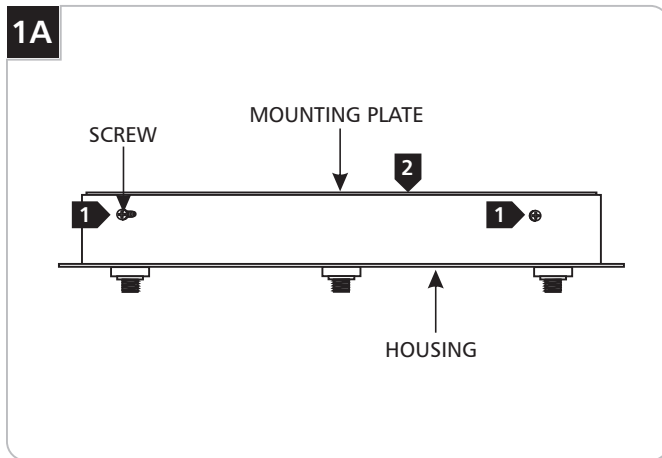


- 1** Remove the three screws around the canopy with a Phillips screwdriver.
- 2** Lift the mounting plate from housing.

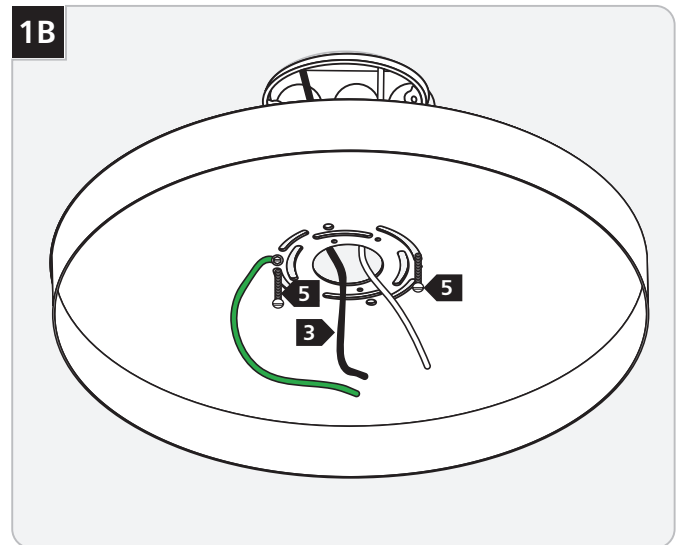


- 3** Feed the 120 volt power line wires through the mounting plate center hole.
- 4** Line up mounting plate slots with the electrical box holes.
- 5** Mount the mounting plate to the electrical box with the two #8-32 screws.

1C

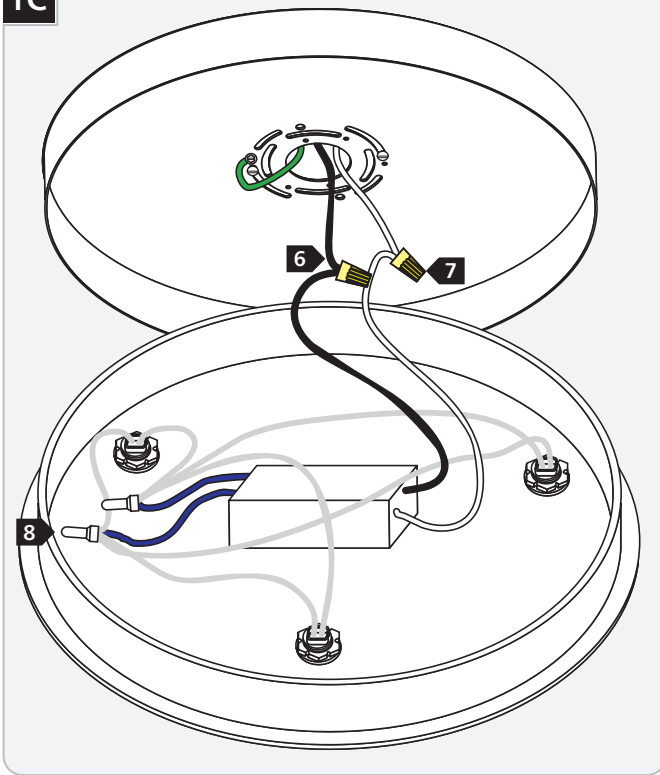

- 6 Connect the black wire to the hot power line wire and the white wire to the neutral power line wire with wire nuts.
- 7 Ground the mounting plate in accordance with local electrical codes.
- 8 Place the wires properly inside the mounting plate.


1D

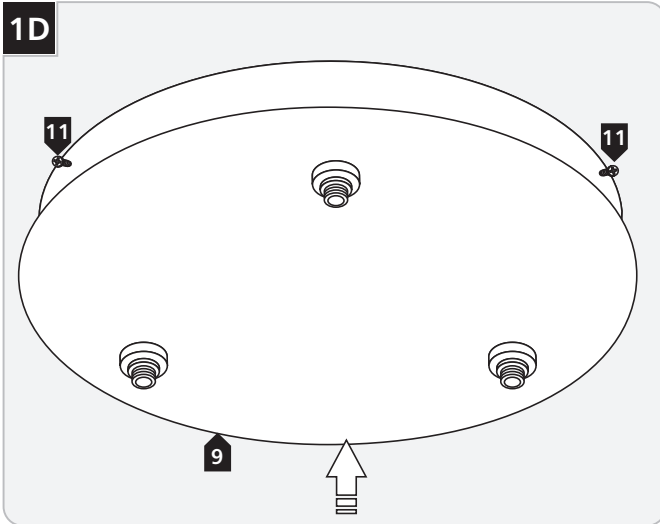

- 9 Slide the housing onto the mounting plate.
- 10 Line up the housing holes with the mounting plate.
- 11 Replace and tighten the three screws to secure the canopy.

Connect the Fixtures to the 3-Port MonoPoint Canopy

2A

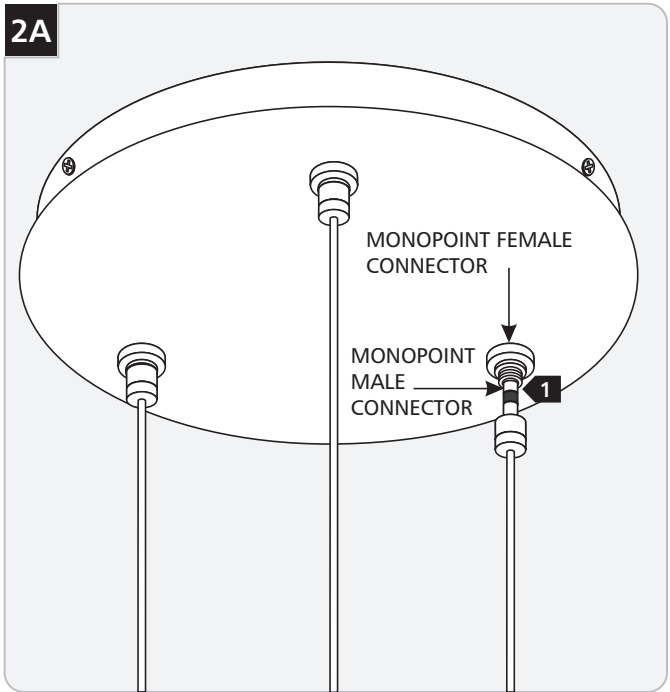

- 1 Screw the fixture MonoPoint male connectors into the canopy female connectors.

SAVE THESE INSTRUCTIONS!

tiella[™]
real light, real simple

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.tiella.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "tiella" graphic is a registered trademark of tiella. tiella reserves the right to change specifications for product improvements without notification.

A Generation Brands Company