


ASSEMBLY INSTRUCTIONS

ITEM NO: BO-466

1. CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE AND LAY THEM UP AS PER THE SKETCH.
2. UNSCREW THE THREE FINIALS(C) THEN SEPARATE THE BODY SECTION(D) AND BASE SECTION(A), SCREW THE BULB(B) INTO THE SOCKET OF THE BASE SECTION(A) AND FOIST INTO THE EXTRA WIRE INTO BASE SECTION (A), PUT DOWN THE BODY SECTION (D) INTO BASE SECTION (A) THEN FIX WITH THE TREE FINIALS(C).
3. SCREW THE NIPPLE (E) INTO THE BODY SECTION (D).
4. PUT THE WASHER(F), SHADE(G) ONTO THE NIPPLE(E), AND FIX SHADE WITH FINIAL (H), THEN ADJUST THE SHADE.

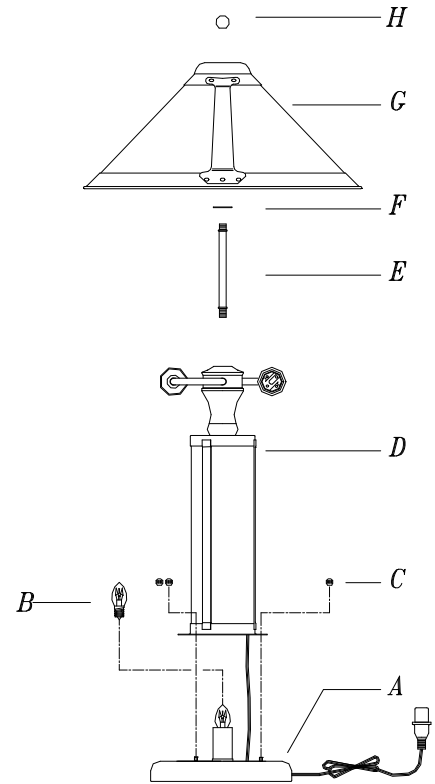

YOUR LAMP IS NOW READY TO ENJOY.

CAUTION: PLEASE FOLLOW STEP 2 WHEN YOU REPLACE THE NILGHT LAMP.

WATTAGE: 2X40W TYPE A (EX BULB)

1X7W TYPE C (IN BULB)

IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

325198B