


| | Type | | | |
|-------|--------------------------|--------------------------|--------------------------|--------------------------|
| | -20 | -30 | -31 | -82 |
| P5641 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| P5642 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

| Catalog No. | Finish | | | | Lamping | Dimensions (Inches) | | | |
|-------------|--------|-------|-------|---------------|-----------------------------|---------------------|----|-------|-------|
| | Bronze | White | Black | Metallic Gray | | A | B | C | D |
| P5641 | -20 | -30 | -31 | -82 | 1-250w QPAR38, 150w BR40 | 6 | 12 | 8-7/8 | 4-1/2 |
| P5642 | -20 | -30 | -31 | -82 | 2-250w QPAR38 | 6 | 18 | 8-7/8 | 8 |

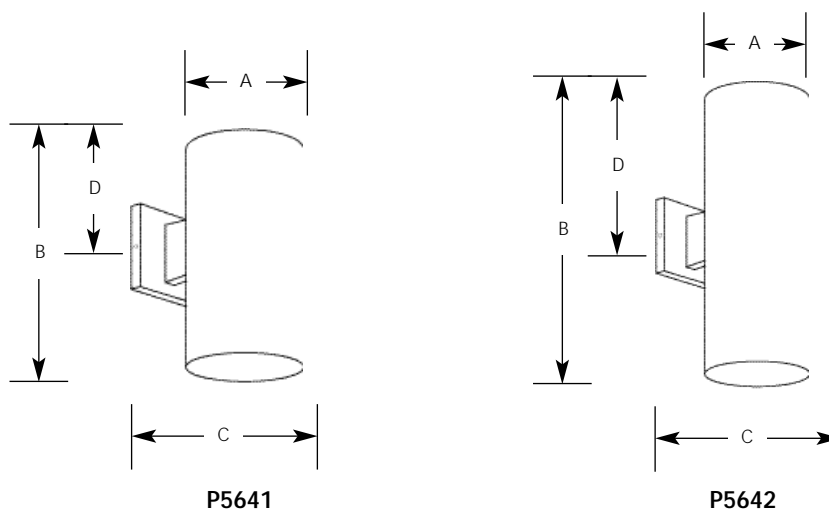

Specifications:

General

- Extruded aluminum .125 wall thickness one piece cylinder
- Cast aluminum wall bracket
- P5641 - Down lighting
- P5642 - Up/Down lighting. P8798-31 top cover lens recommended when unit is used outdoors
- Interior finish matches exterior finish

Mounting

- Covers any outlet box
- Cast mounting bracket is 4-1/2" square
- Outlet box mounting bracket supplied permitting attachment of unit to wall with one almost invisible set screw

Electrical

- Medium base porcelain socket with nickel plated brass screw shell

Accessories

- P8798-31 Top lens cover for P5642 fixture

Options

- Bronze finish - specify " 20" suffix
- White finish - specify " 30" suffix
- Black finish - specify " 31" suffix
- Metallic Gray finish - specify " 82" suffix

Labeling

- UL-CUL wet location listed (5642 only with top cover lens)