

SPECIFICATIONS:

DESCRIPTION

Wall-mounted ADA-compliant sconce featuring open-ended handcrafted glass.

LAMPING

Standard is 75W A19 120V incandescent, suitable for dimming.

CFL: 18W 4-Pin CFL with non-dimming electronic ballast.

SB-CFL: Self-ballasted GU-24 lampholders. 18W max, 120V.

Lamps not included.

DIFFUSER

Diffuser shall be handcrafted glass of various decors.

CONSTRUCTION

Glass is secured to the backplate by braided wire.

Rectangular backplate (nominal 4" W x 6.5" H) shall be constructed of steel, powder-coated white.

METAL FINISH

Decorative metal accents shall be in various finish options.

MOUNTING


Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 3.625" above the outlet box centerline.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



704307-SN
Opal Matte

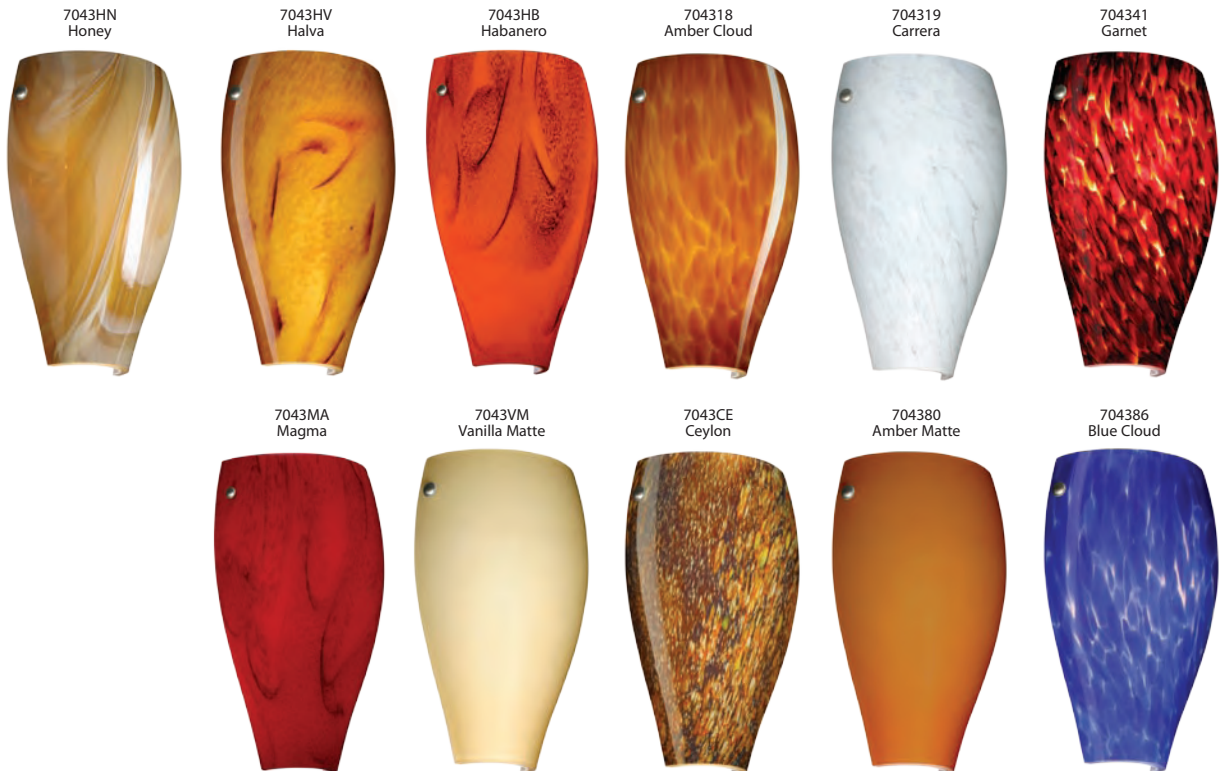


For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

ORDERING:

Fixture/Decor	Lamping	Metal Finish
704307 Opal Matte	() 1x 75W A19 Incand.	BK Black
704318 Amber Cloud	E1 1x 18W Quad 120V	BR Bronze
704319 Carrera	N1 1x 18W Quad 277V	PN Polished Nickel
704341 Garnet	W1 1x 18W GU-24 120V	SN Satin Nickel
704380 Amber Matte		WH White
704386 Blue Cloud		
7043CE Ceylon		
7043HB Habanero		
7043HN Honey		
7043HV Halva		
7043MA Magma		
7043VM Vanilla Matte		



Project Information: