


Assembly Instructions For

F2654/3 (E) 12/10


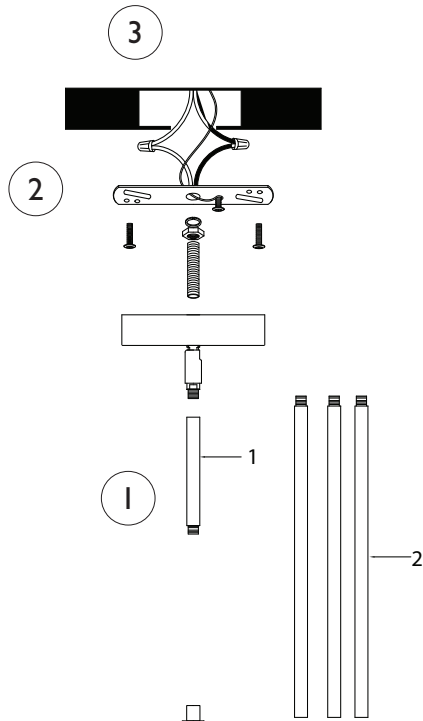


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Install stems:
 - A. Choose desired installation height from any combination of stems provided. NOTE: Additional stems can be purchased to increase installation height. Do not add more stems than will allow 6" (15 cm) of fixture wires above canopy. Thread fixture wires through each stems to be used. Screw stems together until secure. Screw stem assembly into top of fixture until secure. NOTE: This fixture can be installed without any stems for direct mount onto canopy.
 - B. Screw swivel securely onto top end of stem assembly (or top end of fixture for without stem installation).
2. Measure 6" of wire from end of fixture plate and cut off remaining wire. Split wires and strip off 3/4" of insulation from each end.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
4. Install shade by fastening with counter ring.
5. Install light bulb (not included). See relamping label at socket area for type and maximum allowed wattage.

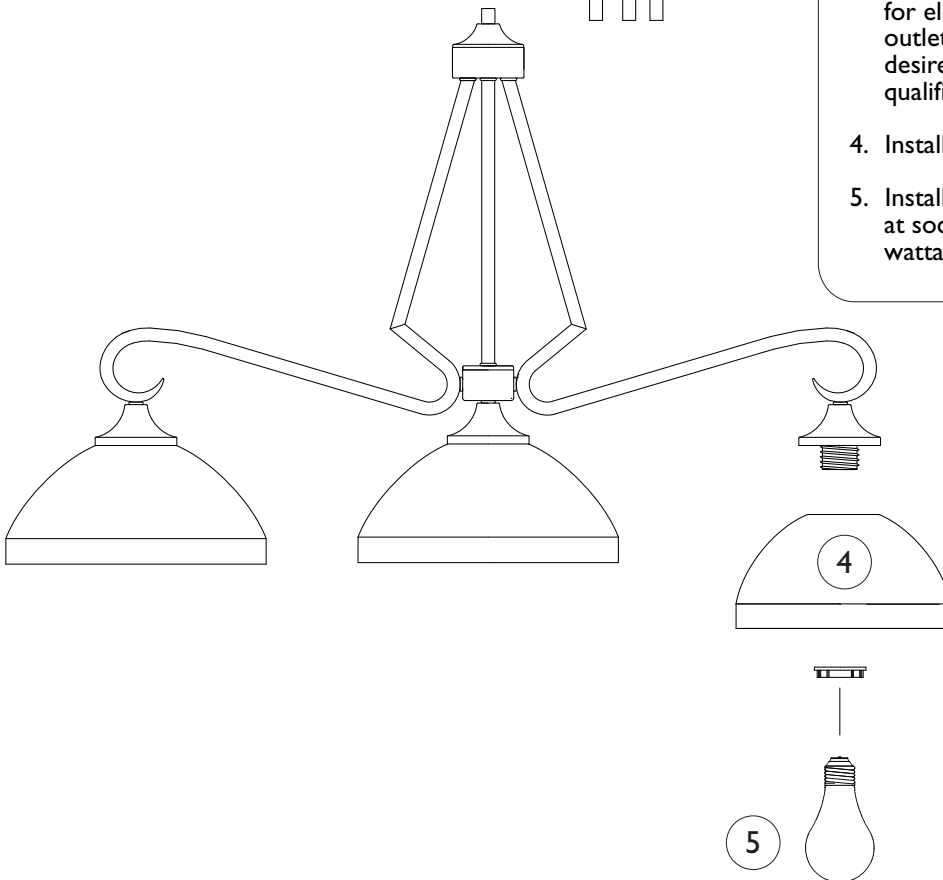

MURRAY
FEISS

GENERATION
BRANDS™