
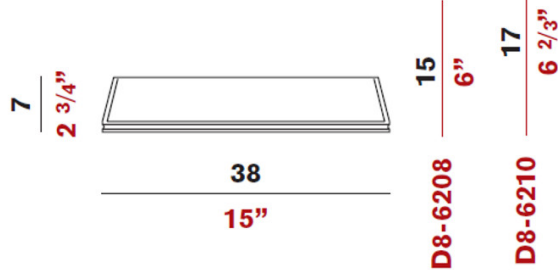
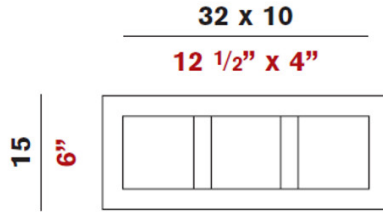



Date: _____ Project: _____
Fixture Type: _____ Specifier/Rep: _____



Certified by  North American Standards

Available for International specifications by adding "INT" at the end of the existing Model # International spec sheets are available upon request

Exact Measurements: Metric

Model:	D8-6208
Installation:	Trimless - Ceiling
Light Color:	Warm White
Color Temperature:	3000K
Nominal Lumen:	3x600lm
Fixture Finish:	White
Fixture Material:	Plaster
Optic:	3x40°
Lamp Type:	LED
Constant Current:	350mA
Number of LEDs:	3.0
Max Wattage Per Lamp:	6.7W
Total Wattage:	16.8
IP Rating:	IP20
Width:	15cm / 6"
Length:	38cm / 15"
Height:	7cm / 2 3/4"
Min. Recessing Depth:	15 cm / 6 "
Power Supply:	2 x Remote LED drivers 120Vac/350mA (Not Included - See components)

LED module included.
6.7W and 11.2W versions shown.
See fixture specifications.



Additional Details

Plaster Housing Frame (D8-6006) with 3 X adjustable Metal White Spot LED (D8-6116) - Driver sold separately (see system components)

System Components

Date: _____ Project: _____

Fixture Type: _____ Specifier/Rep: _____

Invisibili - LED Driver DR009350 Driver 1-9W 350mA
Invisibili - LED Driver DR017350 Driver 17w 350mA

Available Sizes and / or Lamping

Invisibili - Adjustable - 15" - 20.1W LED D8-6208 38cm / 15" x 15cm / 6" - Adjustable Plaster Housing Frame + 3x6.7W LED, 3000K, 350mA, 40°, 3x600lm

Invisibili - Adjustable - 15" - 33.6W LED D8-6210 38cm / 15" x 15cm / 6" - Adjustable Plaster Housing Frame + 3x11.2W LED, 3000K, 350mA, 40°, 3x1230lm