

# INSTALLATION INSTRUCTIONS FOR 6275 6369

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

## ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the tube (F) onto the pipe nipple (G) of the fixture body (M), by turning it clockwise until tight.
4. Attach the tube (E), (D) and (C) onto the pipe nipple of the tube, by turning it clockwise until tight.
5. Open the link (B) and hang the fixture lamp on the loop of the canopy (A), close the link (B).
6. Thread the two studs into the pre-drilled holes in the Mounting plate spaced the same distance apart as the holes in the canopy (A).
7. Attach the Mounting plate to the Junction Box with the two Junction Box Screws as shown. The side of the Mounting plate marked "GND" must face to out.
8. While holding the fixture lamp towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting plate with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
8. Raise the canopy (A) on to the Junction box, aligning screws on mounting plate with mounting holes in canopy and lock it securely with ball nuts.
9. Put the glass (L) onto the socket of the fixture body (M), and lock it securely with ring (H).
10. Put the loop (K), shade (J) and loop (I) onto the glass (L).
11. Install the light bulbs in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**

**Your installation is now complete Return power to the junction box and test the fixture.**

Fig.1

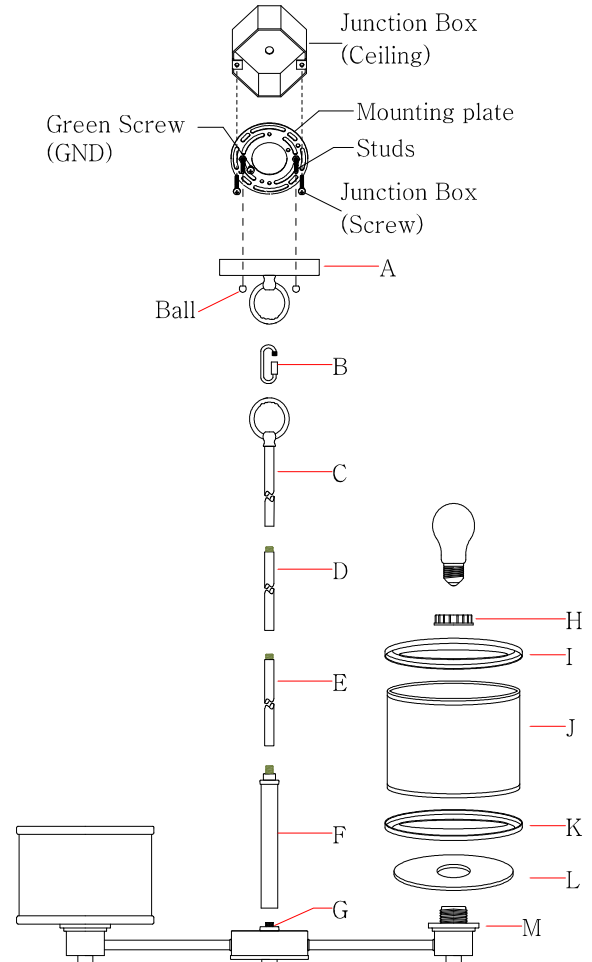


Fig.2

FIXTURE WIRES Black or Smooth	HOUSE WIRES Black (Hot)	<td>                 FIXTURE WIRES                  White or Ribbed             </td> <td>                  HOUSE WIRES                  White (Neutral)             </td> <td> <td>                 FIXTURE WIRES                  Bare Copper (Ground)             </td> <td>                  HOUSE WIRES                  Green or Bare Copper (Ground)             </td> </td>	FIXTURE WIRES White or Ribbed	HOUSE WIRES White (Neutral)	<td>                 FIXTURE WIRES                  Bare Copper (Ground)             </td> <td>                  HOUSE WIRES                  Green or Bare Copper (Ground)             </td>	FIXTURE WIRES Bare Copper (Ground)	HOUSE WIRES Green or Bare Copper (Ground)
----------------------------------	----------------------------	---	----------------------------------	--------------------------------	---	---------------------------------------	--