

SIGNATURE NATURALS

Narrow-plank PureForm™ Solid Bamboo Flooring



FINE BAMBOO FLOORING, PANELS & WORKTOPS

Our classic PureForm™ bamboo in our original narrow-plank design comes in Multiple Precise Lengths of 2,3,4 and 6 feet for an intentionally random visual when installed. Featuring a tongue and groove profile for flexible installation. Designed for use in commercial and residential interiors.



FEATURES + BENEFITS

PERFORMANCE

- Durable 7-step UV Cured Polyurethane coating with aluminum oxide wear layer for abrasion resistance
- Premium PureForm bamboo – 40% harder than oak
- Optimum 5.5 Moso Bamboo: Harvested at maturity for peak density, creating a harder and more stable product for lasting beauty and performance
- Approved for installation over radiant heat flooring systems

VALUE

- Lifetime structural warranty; 10-year heavy-use commercial/25-year residential finish warranties

ECOSMART

- Certified USDA BioPreferred – 99% biobased content
- FSC-certified material available upon request*


INDOOR AIR QUALITY

- Floorscore certified for superior indoor air quality.
- Qualifies for Collaborative for High Performance Schools 2009 Criteria EQ2.2.3 – Low Emitting Materials




PRODUCT DETAILS

Nominal Dimensions :	24, 36, 48 & 72.44" x 3.62" x 0.59" 610mm, 920mm, 1220mm & 1840mm x 92mm x 15mm
Construction:	Solid PureForm™ Traditional Bamboo
Milling:	4 Side Micro-bevel
Profile:	Tongue and Groove
Accessories:	Full line of coordinating 15mm accessories
Color Variation:	Moderate




LEED® CREDITS

- IEQ 4.3 Low Emitting Materials
- MR6 Rapidly Renewable Materials
- Certified Wood: MR7 – *available upon request

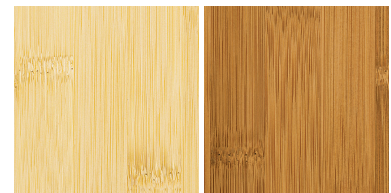

Flat Grain
Natural

Flat Grain
Caramelized

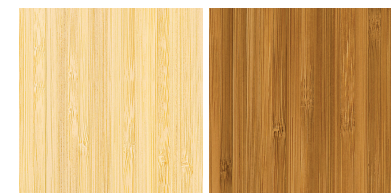

Vertical Grain
Natural

Vertical Grain
Caramelized

INSTALLATION + CARE

Installation Environment:	Nail, Staple and Glue installation into environments having 35-55% RH. Can be installed over radiant heat.
Nail & Staple Installation:	On or Above grade. Use vapor retarder over wood subfloor.
Glue Installation:	On or Above grade. Use a vapor barrier over cement subfloor OR vapor retarder over wood subfloor.
Recommended Adhesive:	Premium Bamboo Flooring Adhesive
Nailing Guidelines:	15-16 gauge cleat or staple 1 1/2"-2"
Acclimation:	Minimum of 48 hours on-site in box
Maintenance:	BonaKemi Pro Series Hardwood Floor Cleaner or equal