


PEARSON™

PL8018** Orbital Ceiling Fan

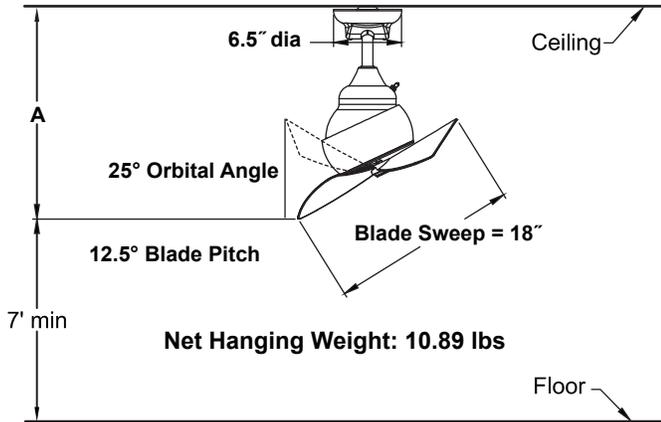

	A
Fan w/6" downrod	20.33"
Fan w/12" downrod	26.33"
Fan w/18" downrod	32.33"
Fan w/24" downrod	38.33"
Fan w/36" downrod	50.33"
Fan w/48" downrod	62.33"
Fan w/60" downrod	74.33"
Fan w/72" downrod	86.33"

Available Finishes

OB	Oil-rubbed Bronze with Oil-rubbed Bronze Blade and Oil-rubbed Bronze Blade Cap
BN	Brushed Nickel with Black Blade and Brushed Nickel Blade Cap

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	765	1876	30	0.53	62
Med	578	1309	26	0.42	51
Low	468	963	22	0.35	43

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

82 x 25 motor is designed for optimal performance with this fan.

FAN SPEEDS:

3 forward, non-reversing, fan speeds with rotary switch (on top of motor).

High—765rpm; Med—578rpm; Low—468rpm

CONTROL OPTIONS:

CW110WH 3-speed fan-only wall control is included. Optional RC110WH hand-held remote control is available—sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 50°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call technical support for more information.

LOCATION USE:

Fan is rated for dry or damp locations.